



RISMET

Assessment and applicability of evaluation tools: Current practice in a sample of European countries and steps towards a state-of-the-art approach

Deliverables Nr 4 and 5
May 2011



Project Coordinator:

SWOV – Institute for Road Safety Research

Project Partner 2:

TUD - Technische Universität Dresden

Project Partner 3:

LNEC - National Laboratory for Civil Engineering

Project Partner 4:

TØI - Transportøkonomisk institutt Stiftelsen Norsk senter for samferdselsforskning

Project Partner 5:

TRL - Transport Research Laboratory

Project Partner 6:

KfV - Kuratorium für Verkehrssicherheit

Project Nr. 823137

Project acronym: RISMET

Project title:

Road Infrastructure Safety Management Evaluation Tools

Deliverables Nr 4 and 5 – Assessment and applicability of evaluation tools: Current practice in a sample of European countries and steps towards a state-of-the-art approach

Due date of deliverable 4: 30.06.2010

Due date of deliverable 5: 31.10.2010

Actual submission date: 26.05.2011

Start date of project: 01.09.2009

End date of project: 01.09.2011

Author(s) this deliverable:

Rune Elvik, Institute of Transport Economics, Norway

Version: Final

Executive summary

This report surveys current practice in a sample of European countries with respect to the use of ten different tools for safety management of road systems. The report also proposes steps that can be taken to bring the use of these management tools closer to their state-of-the-art versions. These tools and their intended functions include:

1. Road safety audits, to help incorporating the best knowledge about how to design a safe road into decisions about the design and construction of new roads, thus making new roads safer than existing roads,
2. Safety inspections, which are ordinary periodical verification of the characteristics and defects that require maintenance work for reasons of safety,
3. Network screening, to survey road safety on the entire road system and identify those parts of the system that have a higher expected number of accidents, or a higher severity of accidents, than the rest of the system,
4. Accident modelling, to help identify and assess the importance of various factors that contribute to accidents and injuries,
5. Road protection scoring, to help identify roads which offer substandard protection from injury in case of an accident,
6. The identification and analysis of hazardous road locations, i.e. road locations that have an abnormally high number of accidents due to deficiencies of road design and/or traffic control,
7. Road safety impact assessment, which estimates the safety benefits expected from various road safety measures before these measures are introduced,
8. Monitoring of road user behaviour, to help detect unwanted changes in behaviour that may have an important effect on road safety,
9. Traffic conflict studies and naturalistic driving behaviour studies, which is the study of events that nearly lead to accidents or of driver behaviour in a natural setting,
10. In-depth accident studies, in order to learn more about the factors that precipitate accidents and the opportunities for controlling or removing these factors.

A questionnaire survey was conducted in order to describe current use of these tools and assess the applicability, or ease of use, of the tools. The survey found that all countries use several of the tools listed above, but few countries use all of them.

A total of 18 countries answered the questionnaire. Between 15 and 17 of these countries were included in statistical analyses designed to uncover the relationship between use of the safety management tools and road safety performance. Use of the management tools was described in terms of an index with a range from 0 to 32 points. Country scores ranged from 12 to 31 points. Four indicators of road safety performance were used:

1. Fatality rate per billion km of travel in 2008.
2. Mean annual percentage reduction of the number of road accident fatalities between 1990 and 2009.
3. Mean annual percentage reduction of fatality rate per billion km of travel from 1990 to 2008.
4. Change in the mean annual percentage reduction of fatality rate from the period 1990-2000 to the period 2000-2008.

Two models of analysis were applied. In the first model, each country had the same statistical weight. In the second model, countries were assigned different statistical weights depending on the number of fatalities in 2008 or on the goodness-of-fit of an exponential trend curve fitted to annual fatality counts from 1990 to 2009. The weighted analyses are

regarded as statistically most appropriate.

Two variables were used to control for other factors that may influence safety performance. The first of these was governance performance, assessed according to worldwide governance indicators developed by the World Bank. The governance indicators measure how well a country is governed. It was assumed that a high quality of government would be associated with a good road safety performance. The governance indicator was used in the analysis that used the fatality rate in 2008 as indicator of safety performance and in the analysis that used the mean annual decline in fatality rate from 1990 to 2008 to indicate safety performance.

The second potentially confounding variable used in the analyses was mean annual traffic growth (percent) from 1990 to 2008, or the change in the mean annual rate of traffic growth from the period 1990-2000 to the period 2000-2008. This variable was used in the analysis that used the mean annual decline in the number of fatalities from 1990 to 2009 as indicator of safety performance and in the analysis that used the change in the mean annual reduction of fatality rate from the period 1990-2000 to the period 2000-2008 as indicator of safety performance.

The findings were mixed and highly uncertain. No clear relationship was found between the use of the safety management tools and safety performance. It is not the case that a more extensive use of these tools automatically ensures a superior road safety performance. It is likely that the findings of the study are primarily related to methodological weaknesses.

The main conclusions of this study highlight the opportunities for further development of the tools for road safety management:

1. Road safety audits, safety inspections and road protection scoring can be further developed by evaluating their effects on safety and their performance in identifying safe and less safe solutions.
2. Network screening should be based on accident models and should apply the techniques developed in the Safety Analyst approach in the United States.
3. Road accident modelling needs to be developed by testing models empirically and by incorporating in them variables describing road user behaviour.
4. The identification and analysis of hazardous road location should employ the Empirical Bayes (EB) approach for identification of hazardous locations and the matched-pair approach for the analysis of factors that may contribute to accidents at hazardous road locations.
5. The state-of-the-art of road safety impact assessment is described in the Highway Safety Manual recently published in the United States. Changes made in current practice should try to bring it closer to the state-of-the-art.
6. Monitoring of road user behaviour should be targeted at about five types of behaviour that make the largest contributions to road accidents and injuries. In most countries, this would include speeding, not wearing seat belts and drinking and driving.
7. Conflict studies, naturalistic driver behaviour studies and in-depth studies of accidents are tools that road authorities may choose to include in their safety management toolbox; none of these tools is essential.

Table of contents

1	Introduction	7
1.1	Safety management as a part of safety policy	7
1.2	Research problems	8
1.3	Objective of this report	9
1.4	Context of the report	9
2	An overview of evaluation tools	10
2.1	The European Union Directive on road safety management	10
2.2	Road safety audits	11
2.3	Safety inspections	11
2.4	Network screening (network safety ranking)	12
2.5	Accident modelling	12
2.6	Road protection scoring	13
2.7	Identification and analysis of hazardous road locations (ranking of high accident concentration sections)	13
2.8	Impact assessment of investments and road safety measures	14
2.9	Monitoring road user behaviour	14
2.10	Conflict studies and naturalistic driving studies	15
2.11	In depth analysis of accidents	15
2.12	Other safety management tools	16
2.13	When are safety management tools applied?	16
3	Criteria for assessing the applicability of evaluation tools	18
3.1	Data requirements	18
3.2	Availability and use of standard procedures	18
3.3	Reporting requirements	19
3.4	Need for training and specialised skills	19
3.5	Objectivity and transparency	20
3.6	Ease of updating tool and results based on it	20
3.7	Benefit-cost ratio of evaluation tools	20
4	Current use of evaluation tools in Europe	22
4.1	The questionnaire	22
4.2	Coding answers to the questionnaire	22
4.3	Framework for statistical analysis	24
4.4	Results of analysis	29
4.5	Discussion of findings	31
5	The state-of-the-art and steps to improve road safety management evaluation tools in Europe	32
5.1	Improving road safety audits	32
5.2	Improving safety inspections	33
5.3	Improving network screening	34
5.4	Improving accident modelling	34
5.5	Improving road protection scoring	36
5.6	Improving identification and analysis of hazardous road locations	37
5.7	Improving impact assessment	38
5.8	Improving the monitoring of road user behaviour	40
5.9	Improving conflict studies	40
5.10	Improving in-depth accident studies	41
6	Discussion and conclusions	44
7	Sources	46
8	Appendix 1: Questionnaire	51
9	Appendix 2: Responses to the questionnaire	58

10	Appendix 3: Long term trends in road accident fatalities in 17 countries.....	61
----	---	----

1 Introduction

“ERA-NET ROAD – Coordination and Implementation of Road Research in Europe” was a Coordination Action funded by the 6th Framework Programme of the EC. The partners in ERA-NET ROAD (ENR) were United Kingdom, Finland, Netherlands, Sweden, Germany, Norway, Switzerland, Austria, Poland, Slovenia and Denmark (www.road-era.net). Within the framework of ENR this joint research project was initiated. The funding National Road Administrations (NRA) of this joint research project are: United Kingdom, Germany, the Netherlands, Norway and Portugal. The results of the project are, however, of interest for all member states of the European Union. The topic of the project is the use of road safety management evaluation tools. The European Union has adopted a Directive (2008/96/EU) requiring countries to use four of the management tools covered by this report in order to make road safety policy more effective in contributing to the target set for reducing road accident fatalities by 50 percent before 2020.

The RISMET project (Road Infrastructure Safety Management Evaluation Tools), for which this report documents work package 3, was established in order to assess the state-of-the-art with respect to a set of formal techniques of analysis that road administrations can apply in order to identify safety problems and develop effective safety measures. RISMET consists of four work packages, in addition to a work package for project management. Work package 2 deals with data systems and requirement for safety management tools. Work package 3 assesses the applicability of existing road safety management evaluation tools. Work package 4 will consider development of evaluation tools for the future, and work package 5 will provide guidelines and codes of practice. This report gives a description of current practice and an assessment of the state-of-the-art with respect to tools for the safety management of roads. The elements and objectives of safety management are outlined. A set of tools for road safety management are described. Current use of these tools in a sample of European countries is surveyed. State-of-the-art techniques are described for each of the tools. The project may in some respects be viewed as a follow-up of RIPCORD-ISEREST. However, it goes further than that project with regard both to the set of management tools covered and with respect to the assessment of the state-of-the-art. The project is aimed primarily at rural main roads.


Safety management denotes all activities undertaken for the purpose of monitoring the safety of a specific system, such as a road system; detecting unfavourable trends in safety as quickly as possible; gaining an overview of variation in the level of safety between elements of the system; identifying locations that are particularly hazardous, and systematically planning and assessing the impacts of road safety measures. Figure 1 presents an analytical model of road safety policy making, in which the activities that constitute the formulation and implementation of road safety policy are laid out in a logical sequence (Elvik and Veisten 2005).

1.1 *Safety management as a part of safety policy*

Monitoring safety and assessing the contribution of various factors to accidents and injuries is a management activity that forms part of stage 1 of the model in Figure 1. Analysis of potentially effective road safety measures is an important part of road safety management and contributes to stage 3 of the process of policy development. Activities such as network screening and monitoring of road user behaviour (see chapter 2) can be viewed as contributions to stage 4 of policy development, as these tools enable a description of systems and an assessment of the opportunities for intervention. Road safety impact assessment refers to the systematic estimation of the contributions that different road safety measures may give in improving road safety and is a key element in any road safety programme. Impact assessment is placed at stage 6 of the process of policy development.

Safety management is an analytic and politically neutral activity. It is, ideally speaking, based on knowledge and research exclusively and should not be influenced by political consider-

ations. The more politically oriented stages of policy development, such as the setting of safety targets (stage 2) or the determination of the size of safety budgets, are therefore not treated as part of safety management and will not be further discussed in this report. Moreover, determining the priorities between different road safety measures tends to be influenced by multiple factors, some of them analytical, others more political (stage 8). This report will not discuss how to determine priorities between road safety measures, nor will it discuss the constraints that policy makers often take as given when deciding on road safety policy.

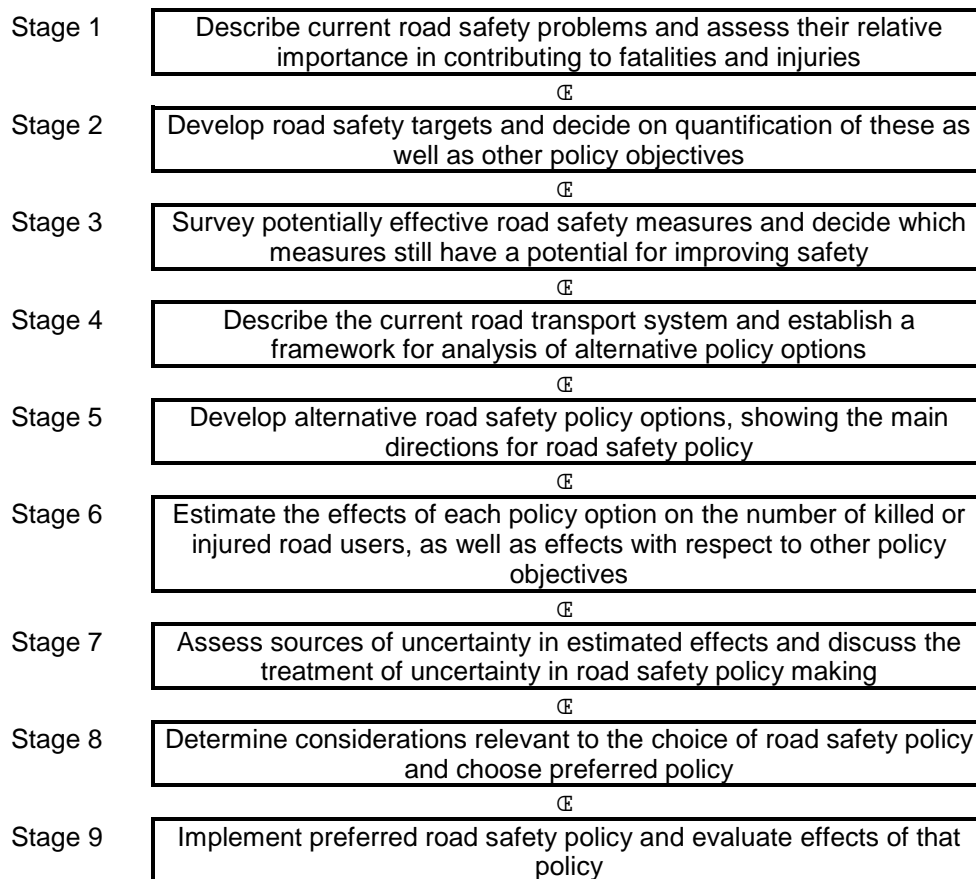

Source: TØI report 785/2005

Figure 1: An analytical model of road safety policy making

1.2 Research problems

The following questions are the main focus of interest in this report:

1. What are the principal analytic tools that can be applied in order to assess the safety of a road?
2. How easy is it to apply these analytic tools?
3. To what extent are the various analytic tools currently used in Europe?
4. Is road safety performance associated with the use of the safety management tools included in this report?
5. How can the tools for assessing the safety of roads be developed in order to further improve the efficiency of road safety management?

Short descriptions of the principal road safety management tools are given in Chapter 2. Criteria for assessing their applicability are discussed in Chapter 3. Current use of the tools is surveyed in Chapter 4. This chapter also reports the results of study intended to evaluate the effects on safety performance of the use of the various management tools. The state-of-the-art and possibilities for improving the tools are discussed in Chapter 5.

1.3 Objective of this report

The first objective of this report is to assess the applicability of existing state of the art analytic tools for evaluating the safety of roads as part of road safety management. For this purpose, current use of the tools has been surveyed and potential barriers to the use of the tools have been identified.

The second objective of the report is to outline steps that can be taken in order to improve the efficiency of the safety management tools, i.e. bring current practice closer to the state-of-the-art.

1.4 Context of the report

This report is part of a recent growth in research regarding road safety policy and tools for safety management that can inform road safety policy and make it more successful. Increasing ambitions for improving road safety, as manifested in the quantified target adopted by the European Union, and concepts of Vision Zero (Vägverket 1997) and Sustainable Safety (Wegman, Aarts and Bax 2005), has stimulated interest in research designed to assess how countries can enhance their road safety performance, i.e. realise important gains in road safety more quickly, preferably without having to spend very much more resources on road safety measures than before.

A collection of 16 scientific papers dealing with road safety management, plus an editorial, was recently published as a Special Issue of Safety Science (Wegman and Hagenzieker 2010). The papers discuss various aspects of road safety management, including:

1. How to compare the safety performance of different countries (Wegman and Oppe 2010).
2. The need for adopting a systems theory perspective and a broad view of factors influencing road safety when developing a targeted road safety programme (Larsson, Dekker and Tingvall 2010, Johnston 2010).
3. How to predict future developments in road safety (Hauer 2010A, Wesemann, van Norden and Stipdonk 2010).
4. How to establish a rational framework for deciding on numerical targets for improving road safety, in particular determining the “right” level of ambition for such targets (Broughton and Knowles 2010).
5. Whether the effects on road safety performance of a quantified road safety target are sustained in the long run (Wong and Sze 2010).
6. How to set efficient priorities for road safety measures, and how to strengthen incentives for efficient priority setting (Elvik 2010A).

Recently, a large study was reported in the United States concerning what the country may learn from other countries with respect to improving road safety (Hauer 2010B). A fairly detailed discussion of lessons to be learnt from France, Norway, Sweden, the Netherlands and the United Kingdom was presented.

These topics are not discussed in this report. This report focuses on the details of continuous road safety management, i.e. on the analytic tools that help government detect emerging safety problems early, that help in locating the most hazardous parts of the road system, that identify the most important road infrastructure related factors contributing to road accidents and injuries and that help to estimate the likely effects of specific road safety measures or a road safety programme consisting of several measures.

2 An overview of evaluation tools

The evaluation tools that are described in this chapter are elements of road safety management. Their chief purpose is to help highway agencies monitor the safety of roads, identify safety problems and identify promising ways of improving safety. The following evaluation tools will be briefly presented:

1. Road safety audits
2. Safety inspections (as per the EU Directive)
3. Network screening (referred to as network safety management in EU Directive)
4. Accident modelling
5. Road protection scoring
6. Identification and analysis of hazardous road locations
7. Impact assessment of investments and road safety measures (referred to as road safety impact assessment in EU Directive)
8. Monitoring of road user behaviour
9. Conflict studies
10. In-depth analyses of accidents
11. Other tools for road safety management

Each of these tools will be briefly described and references given to more extensive descriptions. Key elements of **state-of-the-art** versions of each tool are described. The concept of state-of-the-art implies the highest level of development of a given tool at the time of publication and as recognised by international literature. Certain countries may have country specific tools which for that country are state of the art, but these tools are in the context of this report, not regarded as state of the art.

2.1 The European Union Directive on road safety management

Some of the road safety management tools listed above became mandatory for EU member countries from December 19, 2010. In particular Directive 2008/96/EC of the European Union requires member states of the Union to perform road safety audits, safety inspections, network screening (termed network safety management in the Directive) and road safety impact assessment as a basis for implementing investments on the Trans European Road Network (TERN roads). These are tools 1-3 and 7 on the list above.

The directive defines the tools in the following terms. A road safety audit is defined as an independent detailed systematic and technical safety check relating to design characteristics of a road infrastructure project and covering all stages from planning to early operation. A road infrastructure project is in turn defined as a project for the construction of new road infrastructure or a substantial modification to the existing network which affects the traffic flow.

Safety inspection is defined as an ordinary periodical verification of the characteristics and defects that require maintenance work for reasons of safety. Management of road network safety is not defined in the Directive, but two activities that constitute network safety management are mentioned. These are network safety ranking and ranking of high accident concentration sections. Network safety ranking is defined as a method for identifying, analysing and classifying parts of the existing road network according to their potential for safety development and accident cost savings. The ranking of high accident concentration sections is defined as a method to identify, analyse and rank sections of the road network that have been in operation for more than three years and upon which a large number of fatal accidents in proportion to the traffic flow have occurred. Finally, a road safety impact assessment is defined as a strategic comparative analysis of the impact of a new road or a substantial modification to the existing road network on the safety performance of the road network.

The Annex to the Directive provides further details regarding the specific requirement for each tool and how to implement the use of the tool.

2.2 Road safety audits

A road safety audit is a systematic assessment of plans for new road schemes, intended to ensure that new roads have the lowest attainable accident potential for all kinds of road users. The audit process aims to avoid future crashes by removing unsafe features before they are actually constructed. Thus it is a proactive measure. State-of-the-art road safety audits are:

1. Performed by a team of approved (in some countries formally licensed) auditors who have been formally trained and authorised for the role,
2. Performed in a standardised way according to checklists that are applied consistently and which permit the compilation and comparison of the results of several audits,
3. Organised to ensure that the auditors are independent and have not been involved in the design or planning of the road they are asked to audit,
4. Documented in the form of a report written by auditors, containing specific recommendations indicating changes necessary to ensure a road design will be safe when implemented,
5. Requiring the agency commissioning the audit to give a point-by-point response to auditor recommendations and justify in writing any decision not to comply with the advice of the auditors.

The first road safety audits were performed around 1990 in Great Britain, Australia and Denmark. Road safety audits have now become a standard procedure in road planning in many countries. Detailed guidelines have been developed for road safety audits in many countries. Guidelines for Norway can be found in a handbook issued by the Public Roads Administration (Statens vegvesen, Håndbok 222, 2005). Similar guidelines have been issued in many countries.

In principle, the effects of road safety audits on safety can be evaluated by assessing accident occurrence during the first years of operation on roads that have undergone the process prior to their opening compared with similar roads that did not undergo road safety audits. The European Transport Safety Council (1997) refers to a study that evaluated the safety effects of road safety audits by applying such a study design. The study was performed in 1994 by the Surrey County Council in Great Britain and indicated that audited road safety schemes saved about 1 accident per scheme compared to schemes which were not audited. This saving was considerably greater than the cost of the road safety audit and the modifications of the road schemes resulting from the audit. Unfortunately, similarly designed studies have not been replicated. In general, however, the costs of an audit and the resulting modifications to a road scheme tend to be quite small. Thus even accident reductions that are too small to be statistically detectable may provide societal benefits that are greater than the added costs.

2.3 Safety inspections

A safety inspection is a systematic assessment of the safety of an existing road. The aim is to identify problem features which are not yet apparent from the accident history, or new problems introduced by engineering changes to the road or by modifications in the way it is used. Safety inspections are therefore performed according to the same procedures as road safety audits.

Safety inspections can be organised as thematic inspections, for example, an inspection of guard rails only. Thematic inspections will often cover a larger proportion of the road system than general inspections will.

The selection of roads for inspection can either be based on the results of network screening or a programme of periodic inspection, in which each section is inspected at fixed intervals. An overview of best practice is given by Cardoso et al. (2008).

2.4 Network screening (network safety ranking)

Network screening is a process where variation in the number of accidents between sections of a road network is analysed statistically. The objective of network screening is to identify road sections that have safety problems – either in the form of an abnormally high number of accidents, a high share of severe accidents or a high share of a particular type of accident. Screening may comprise the entire road system within a jurisdiction or be limited to a particular type of road or traffic environment.

There are several versions of network screening, ranging from simple rankings of road sections according to the recorded number of accidents to statistically advanced techniques based on accident prediction models. The method of network screening implemented in Safety Analyst, which is recommended in the recently published Highway Safety Manual, represents the state-of-the-art (Harwood et al. 2002A, 2002B, 2002C, 2002D).

Scoring roads by risk according to the protocol developed by the European Road Assessment Programme (EuroRAP) can be viewed as a form of network screening. EuroRAP is, however, not an official body and the risk rating does not have any official status (EuroRAP 2005).

2.5 Accident modelling

Accident models are developed by statistically assessing how variation in the number of accidents is explained by a range of measured variables and factors, generally using advanced regression techniques. The purpose of accident modelling is to identify factors which significantly influence the number of accidents and estimate the magnitude of their effects. Accident modelling has been a very active field of research in recent years and important progress in the statistical methodologies has been made. A state-of-the-art approach to accident modelling is characterised by the following elements (Lord and Mannering 2010, Elvik 2011):

1. The development of a model is based on a data set that predominantly contains systematic variation in the number of accidents. Models should not be based on small samples with a low mean number of accidents (Lord 2006, Lord and Miranda-Moreno 2008).
2. Data are recorded at the lowest available level of aggregation and homogeneous road sections formed on the basis of key explanatory variables to ensure maximum between-section variation and minimum within-section variation (Cafiso et al. 2010).
3. If variables representing safety treatments are included, analysis should be designed to control for a potential endogeneity bias attributable to such variables. Endogeneity refers to a statistical tendency according to which abnormal values on the dependent variable, i.e. accidents, influences the use of safety measures. The problem is analogous to regression-to-the-mean bias in before-and-after studies, but the direction of bias can often go in the other direction, suggesting that a road safety measure is ineffective or has adverse impacts when it is in fact effective. For an instructive example, see Kim and Washington (2006).
4. The functional form used to describe the relationship between an explanatory variable and the dependent variable is explicitly chosen based on an exploratory analysis. Guidelines for choosing functional form are given by Hauer and Bamfo (1997).
5. Potential bias due to co-linearity among explanatory variables is addressed.
6. Potential bias due to omitted variables is addressed.
7. Potential bias due to outlying data points is addressed.
8. The structure of systematic variation in the number of accidents and in residual terms is specified as accurately as possible. Residual terms are described statistically in a way that permits using model output in the empirical Bayes approach to road safety estimation.
9. Accidents at different levels of severity are modelled separately. If possible, different types of accidents should also be modelled separately.

10. The choice of model form is made explicitly. A dual-state model should only be chosen if prior knowledge suggests that it is superior to a single-state model, given the purpose of developing the accident prediction model.
11. The dependent variable should preferably be the number of accidents at a given level of severity.

Accident modelling forms the basis of network screening in some countries. In other countries, network screening is not model-based.

2.6 Road protection scoring

Road protection scoring is an assessment how forgiving a road is. Several road protection scoring systems have been developed. In Europe, the best-known system is the EuroRAP – The European Road Assessment Programme, which was inspired by the success of the European New Car assessment Programme (EuroNCAP). Similar scoring systems have been developed in Australia (AusRAP), New Zealand (KiwiRAP) and the United States (usRAP) and International Road Assessment Programme (iRAP).

Road features that are relevant to safety are recorded along a road, and a score is assigned that reflects risk. Roads scored according to EuroRAP are assigned a star rating, analogous to the star rating assigned to cars in EuroNCAP. Star Rating results are presented cartographically and are published by motoring organisations, thus informing road users about the relative safety levels of different road sections.

As an example, a road is scored as safe with respect to running-off-the-road accidents if it (Stigson 2009):

1. Has a speed limit not higher than 50 km/h, or
2. Has a safety zone of at least 4 meters and a speed limit not higher than 70 km/h, or
3. Has a safety zone of at least 10 meters and a speed limit higher than 70 km/h.

A safety zone is a level area beside the running lane which does not contain fixed obstacles that may cause injury in case of an accident. Examples of fixed obstacles include rocks, trees, bridge supports or lakes. Similar criteria for assessing the protection score have been developed for head-on crashes and accidents at junctions. Road protection scoring according to EuroRAP considers the safety of car occupants only. It also assumes that cars have a rating of at least four stars according to EuroNCAP and that occupants wear seat belts.

2.7 Identification and analysis of hazardous road locations (ranking of high accident concentration sections)

All countries have a system for identifying hazardous road locations (sometimes referred to as black spots, hot spots or sites with promise) and analysing accidents that occur at such locations. However, few, if any, of these systems are close to the state-of-the-art. Key elements of the state-of-the-art are (Elvik 2008A):

1. Hazardous road locations should be identified from a population of sites whose members can be enumerated. This permits the formulation of precise statistical criteria for the identification of hazardous locations.
2. Hazardous road locations should not be identified by applying a sliding window approach. A sliding window will inflate the number of false positives, i.e. sites that are erroneously identified as hazardous.
3. Hazardous road locations should be identified in terms of the expected number of accidents, not the recorded number of accidents. This is best done by identifying hazardous road locations according to the Empirical Bayes (EB) estimate of safety at each site (Elvik 2008B).

4. Hazardous road locations should belong to the upper percentiles of a distribution of sites with respect to the expected number of accidents.
5. A suitable period of data for identifying a hazardous road location is 3-5 years. This is a compromise between the need for detecting hazardous road locations quickly and the need for accumulating a sufficient number of accidents to permit analysis.
6. Accident severity can be considered when identifying hazardous road locations, provided the expected number of accidents can be reliably estimated at each level of severity.
7. Specific types of accident can be considered when identifying hazardous road locations, provided reliable estimates of the expected number of accidents by type are available.

As far as analysis of accidents at hazardous road locations is concerned, there are indications that the techniques currently regarded as state-of-the-art fail to discriminate effectively between false positives and correct positives. Ideas for a more rigorous approach have been put forward, but this approach is, as far as is known, not used anywhere (Elvik 2006A).

2.8 Impact assessment of investments and road safety measures

Impact assessment denotes the estimation of the expected effect on accidents and/or injuries of investments or road safety measures, performed as part of the planning process. In many countries, computer software has been developed for performing impact assessment and cost-benefit analyses for road investments. This software is in most cases applied only when major capital investments, like building new roads or major upgrading of an existing road, are planned. Many infrastructure related road safety measures are small scale and low-cost interventions. These are not always subjected to impact assessment.

Tools that can make impact assessment of minor projects easier should be developed. The Handbook of Road Safety Measures provides information regarding the effects of many minor road improvements. The Highway Safety Manual (2010) also provides guidance about how to plan and assess the impacts of minor road safety measures. The TARVA tool for road safety impact assessment applied in Finland is virtually identical to the method recommended in the Highway Safety Manual, and should therefore be regarded as a state-of-the-art approach (Peltola and Kulmala 2006, Peltola 2007, 2009). For an example of a road safety impact assessment at the national level, see Elvik (2007A).

2.9 Monitoring road user behaviour

One of the most important factors influencing road safety is road user behaviour. Highway agencies are therefore taking an increasing interest in monitoring road user behaviour in order to assess how it changes over time. Several national road safety programmes contain a number of safety performance indicators that are based on road user behaviour. The most frequently monitored forms of behaviour include:

1. Speed
2. Seat belt wearing
3. Cycle helmet wearing
4. Driving when fatigued (in general based on self reports)

A potentially very important form of behaviour is drinking and driving or driving under the influence of drugs. These forms of behaviour are rarely monitored systematically, and data available on their prevalence are unreliable and incomplete. Other potentially important types of behaviour that are rarely monitored systematically and reliably include use of mobile phones and driving when fatigued (self-reports should not be treated as reliable). Great Britain has run a sophisticated programme for monitoring the use of mobile phones for many years (Department for Transport 2010).

Ideally speaking, the choice of which types of behaviour to monitor ought to be based on the

risk attributable to the specific form of behaviour. It is, for example, important to monitor speed and speeding, because this behaviour is known to be of major importance for road safety. It may be somewhat less important to monitor cycle helmet wearing, because it makes a smaller contribution to the total number of accidents or injuries than speeding.

It is, however, not possible to base the monitoring of road user behaviour strictly on the risk attributable to it, because this risk is sometimes unknown. As an example, there are few – if any – good estimates of the risk attributable to fatigue. As far as mobile phones are concerned, a few estimates of risk can be found, but these are inconsistent, both with respect to the methods used to estimate risk and the size of the estimated contribution. For some types of behaviour, like internal distractions (i.e. drivers do not concentrate fully on driving, but think about other things), unobtrusive monitoring is impossible.

2.10 Conflict studies and naturalistic driving studies

A traffic conflict is any event that would have resulted in an accident if road users had continued travelling without changing direction or speed. Conflicts can be rated according to their severity. A serious conflict is one that nearly results in an accident, in which the road user makes evasive manoeuvres at the last moment.

Recent progress in software for analysing video images has transformed the study of traffic conflicts. It used to be a somewhat subjective technique, which relied on manual coding by human observers. Although these observers were able to make reliable observations when properly trained, a subjective element remained. Modern techniques for processing video images allow for the objective estimation of time to collision by estimating the speed and trajectories of the road users involved (Laureshyn 2010). It is then possible to classify conflicts more accurately and consistently than before and thereby study their relationships to accident occurrence more rigorously.

Another technique that permits an objective assessment of the severity of traffic conflicts and their relationship to accidents is naturalistic driving studies. The results of the 100-car naturalistic driving study in the United States have been analysed in order to determine the relationship between serious traffic conflicts and accidents (Klauer et al. 2006, Guo et al. 2010). The ongoing 1000-car naturalistic driving study will permit more analyses.

2.11 In depth analysis of accidents

Official road accident statistics are, in most countries, not sufficiently detailed to enable an in-depth analysis of accidents. In-depth studies try to reconstruct in detail the events that lead to an accident and identify the factors that produced injuries. In-depth studies often focus on human factors, as these are normally only recorded in fairly crude terms in official accident statistics.

Important elements of in-depth studies, that are not always part of official accident statistics include the reconstruction of pre-crash speed, the estimation of impact speed, the identification of technical defects in vehicles and a comprehensive assessment of the role of human factors, such as blood alcohol content, traces of illicit drugs, seat belt wearing (which is often incompletely or inaccurately reported in official statistics), the sudden onset of illness immediately before the accident, indications that the driver had fallen asleep before the accident or indications of driver distraction.

The purpose of doing in-depth analyses of accidents is both to understand factors leading to accidents and to identify how best to prevent accidents. In-depth studies of fatal accidents have a long history in Finland and the United Kingdom, but have more recently been introduced in Sweden and Norway. In-depth studies in Finland have in recent years focused on factors that influence injury severity (Toivonen 2006). Germany and the Netherlands also perform in-depth studies of accidents. Research reports based on in-depth studies include Sagberg and Assum (2000), Stigson (2009) and Assum and Sørensen (2010A).

2.12 Other safety management tools

The ten tools listed above are all used in more than one country in Europe. Four of them are included in the EU-directive on the safety management of TERN-roads. Assessing the applicability, use and potential effects on road safety of the use of these tools therefore has interest in several countries. However, in addition to these ten analytic tools, other safety management tools that are still not widely used have been developed. One of these tools deserves a brief description, since it deals with a very important aspect of road safety.

A tool for setting safe and credible speed limits has been developed in the Netherlands (Aarts et al. 2009). This is important, since the speed of traffic is one of the most important factors influencing road safety. The Dutch algorithm is based on actual driving speed, but also considers road design and police enforcement. The objective is to set speed limits that are both safe and credible, i.e. accepted by road users as reasonable and therefore eliciting a high level of compliance. The algorithm is fairly complex, and will therefore not be described in detail in this report.

2.13 When are safety management tools applied?

The history of a road can be divided into a number of distinct stages:

1. Planning and construction
2. Opening to traffic and initial adjustment phase
3. Normal operation
4. Periodic inspection, maintenance and renewal of equipment
5. Correction of errors and treatment of hazardous locations
6. Major upgrading and renewal

Figure 2 presents these stages and indicates at which stage the various tools for evaluating the safety of the road for the purpose of improving it are relevant.

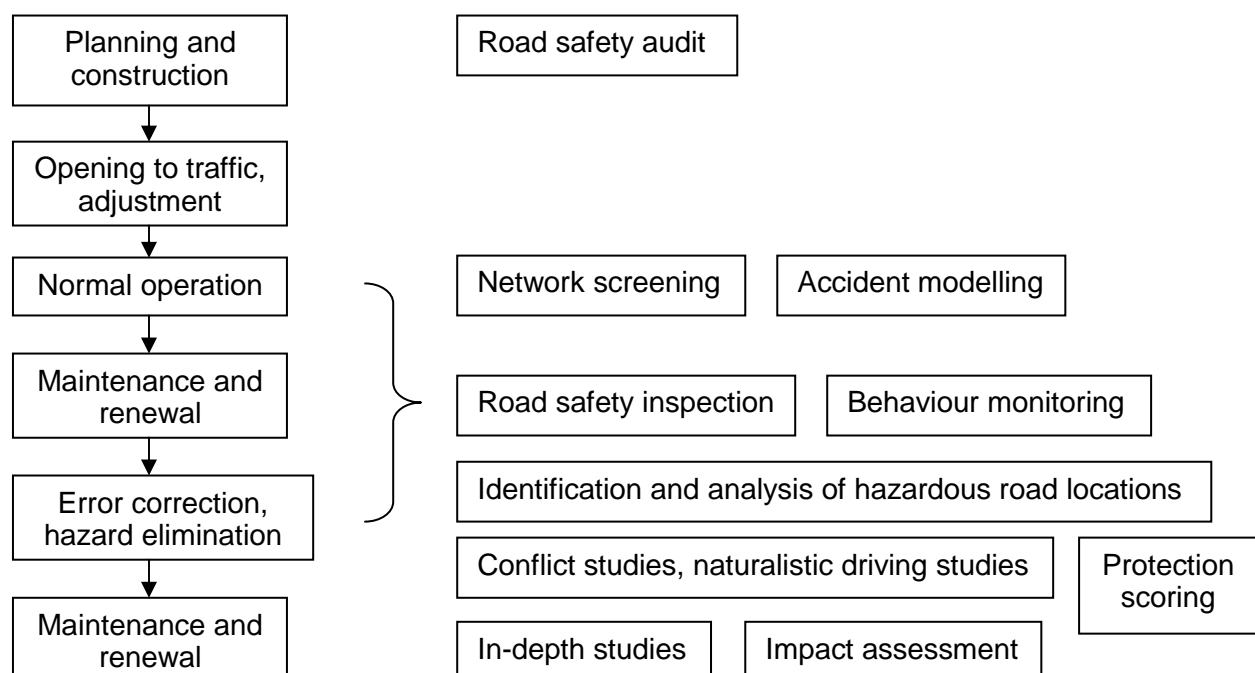


Figure 2: Stages when tools for safety management are applied

Road safety audits are applied during the planning and construction of a road. Audits can be carried out several times during planning and construction. The final stage of auditing is often a test drive of the road a short time before it is opened to traffic, permitting last-minute corrections to be made.

Safety inspections are applied both during the normal operation of a road, i.e. when the road is open to traffic and no major maintenance or upgrading works are in progress and when normal or extraordinary maintenance is planned. Safety inspections may also contribute to error correction and hazard elimination.

Network screening and accident modelling are usually based on the entire road system. No roads are selected for a particular reason, and the objective of both network screening and accident modelling is to describe normal variation in safety on roads that are in normal operation.

The monitoring of road user behaviour also has several purposes. It is both intended to give a representative picture of normal road user behaviour and help identify risky behaviour that may be a target for interventions. It therefore represents both roads in normal operation as well as the identification and correction of errors or departures from normal operation.

The identification and analysis of hazardous road locations, as well as road protection scoring, are intended to identify factors related to road design or traffic control that may lead to accidents or make the accidents more severe. Ideally speaking, there should be no need for these procedures if the road has been properly audited before it was built, and if regular inspections have kept emerging problems under control. However, many roads were built according to other design standards than those that apply today and long before road safety audits or safety inspections were invented. Moreover, changes in traffic patterns that were not foreseen when a road was built can lead to the development of hazardous road locations even if a road complies with design standards. One must therefore expect accidents to occur even on the safest roads and try to detect patterns in accidents as early as possible in order to develop remedial measures.

Conflict studies and naturalistic driving studies also mainly shed light on actual or potential accident problems. These tools are therefore most useful in analysing problems that have not been successfully prevented, in particular problems that are the result of interactions between human factors and infrastructure elements.

In-depth studies of accidents have several applications. Such studies may obviously identify problems of road design or traffic control, but they can also identify problems related to vehicles. The assessment of the impacts of road safety measures is important when choosing the most effective measure to reduce a certain road safety problem. There will usually be more than one measure that can help reduce a given road safety problem. Impact assessments should therefore be based on a broad survey of all potentially effective road safety measures.

3 Criteria for assessing the applicability of evaluation tools

The tools for road safety management that were presented in Chapter 2 differ in terms of their complexity. Not all of them may be readily applicable. This chapter proposes criteria for assessing the application of the tools for road safety management.

3.1 *Data requirements*

As far as data requirements are concerned, a distinction can be made between three levels of data requirements for using the evaluation tools presented in Chapter 2:

1. Tools that can be applied by using available data and standard analyses or tabulations of these data (low data requirements),
2. Tools that require a combination of available data and data that are collected specifically for the purpose of using a specific evaluation tool; customised analyses of these data will normally be required (intermediate data requirements),
3. Tools that require the exclusive use of data collected specifically for the use of an evaluation tool and that require analyses tailored to the tool (high data requirements).

The evaluation tools presented in Chapter 2 differ with respect to data requirements. Road safety audits have low data requirements, as they are based on documents and checklists only, although one could argue that no audit is complete unless it includes accident studies after a road scheme has been opened. Such follow-up studies are, however, not routinely made. Safety inspections may require more data, in particular if accident data and field visits are to be included. Network screening is intermediate with respect to data requirements; in general no new data are collected specifically for the purpose of performing a network screening, but several existing sources of data may be combined. Accident modelling is intermediate or high in data requirements; sometimes new data are collected, but it is more often the case that data from several sources that form a road data bank are combined. Road data banks will usually contain a number of specialised registries, such as the accident record, a traffic volume record, a speed limit record, a road surface record, a record of geometric data, etc. These registries need to be combined when developing accident models. In some cases, new data will be collected by driving along the roads whose safety is to be modelled (see e.g. Cafiso et al. 2010).

Road protection scoring is intermediate or high in data requirements; it relies on taking careful notes while driving along roads with an instrumented vehicle. The identification of hazardous road locations as currently practised is low in data requirements, but would require more data if more sophisticated techniques are adopted. Impact assessment, monitoring of road user behaviour, conflict studies and naturalistic driving studies, and in-depth accident analyses are all high in data requirements. These are tools that rely on extensive data collected specifically to enable the use of the tools.

3.2 *Availability and use of standard procedures*

Some evaluation tools rely on standardised procedures, some do not. In general, it is easier to use a tool when a standardised procedure for using it has been developed than when the user has to invent his or her own procedure.

Most of the evaluation tools presented in Chapter 2 employ standardised procedures. In the case of road protection scoring according to EuroRAP, the assessment protocol is not public, but it is standardised and applied uniformly in order to be able to compare roads in terms of their protection score. This is not the case for accident modelling. Accident modelling can be done in many ways, and although researchers working close to the research frontier may discourage some approaches and recommend other approaches, highway agencies cannot

always afford the luxury of doing state-of-the-art accident modelling, but may have to settle for cruder approaches. Likewise, impact assessment of road safety programmes can be done in a very detailed and systematic way or in a more informal and judgmental way.

Monitoring of road user behaviour is usually based on protocols specifying how to measure speed, how to observe seat belt wearing, etc. The times and locations of monitoring may be selected to ensure that data are statistically representative of traffic in general, but this is not always the case.

Standard procedures will normally exist for conflict studies and naturalistic driving studies. In-depth studies also tend to be based on detailed protocols specifying how to perform such studies. However, the protocols used may not be the same in all countries. It is therefore not necessarily meaningful to compare, for example, the results of in-depth accident studies made in Sweden to those made in Norway. It has been found that the findings of in-depth accident studies are strongly influenced by the perspective adopted, as reflected in the guidelines serving as the basis of in-depth studies (Lundberg, Rollenhagen and Hollnagel 2009).

3.3 Reporting requirements

All evaluation tools are based on the assumption that the results of their use are documented. Documenting the use of the tools is essential to enable learning. If, for example, a road safety auditor simply told a planner orally that he had to change a certain design, this knowledge might remain private and the same inappropriate design be proposed again.

Reporting may be more or less systematic. Results of road safety audits and safety inspections are often entered into large databases to permit effective learning. These databases expand as new audits or inspections are reported. This practice is likely to be less common for network screening and identification of hazardous road locations. Ideally speaking, impact assessments should also be entered into a database to enable subsequent evaluation of their accuracy. However, it is still not common that the effects of road safety measures are routinely monitored and compared to ex-ante impact assessments.

Annex IV of the EU Directive on road safety management specifies what an accident report should contain. The specification is quite detailed, and it seems clear that current accident reporting does not always fulfil the requirements of the Directive. Article 10 of the Directive calls for an exchange of best practice with respect to the use of the management tools and the experiences gained by using the tools. Such an exchange implies that member countries systematically draft reports regarding their use of the tools comprised by the Directive.

3.4 Need for training and specialised skills

All evaluation tools require specialised knowledge and skills. However, there is some variation with respect to the needs for training and specialised skills. Arguably the most highly specialised tool is accident modelling. It is a rapidly evolving field, in which not even leading researchers are able to keep pace with the research frontier. The identification of hazardous road locations, on the other hand, is done by computers applying quite simple criteria.

A rough distinction can be made between tools that require extensive training and highly specialised skills, tools that are at an intermediate level with respect to the expertise needed to use them, and relatively simple tools. Tools that require a high level of expertise include road safety audits, safety inspections, network screening, accident modelling and in-depth analyses of accidents (Vaneerdewegh and Matena 2007). Expertise at an intermediate level is required for identification and analysis of hazardous road locations, road protection scoring, impact assessment, monitoring road user behaviour and conflict studies.

Article 9 of the EU Directive concerns the appointment and training of safety auditors and

instructs member states to develop training curricula for auditors. Training is to be completed by a certification of competence. Periodic retraining is recommended. It is recommended that safety auditors have relevant experience and training in road design, road safety engineering and accident analysis.

3.5 *Objectivity and transparency*

The objectivity of an evaluation tool refers to its between- and within-subject reliability. The “subject” is the analyst, or team of analysts, using a certain evaluation tool. A tool is objective when different analysts or teams of analysts, or the same analyst on different occasions, obtain the same findings when relying on the same data. If findings differ, then something other than the data or the procedure embodied in the tool must have influenced the findings. The tool is then not one hundred percent objective.

An evaluation tool is transparent if all steps in its use are explicit. If the progression from one step to the next is made without justification, or is implicit, it is difficult for others to replicate it. This has been a problem in accident modelling. Analysts rarely justify why they included certain explanatory variables. The result is that different accident models include different variables, making their results impossible to compare. The models lack transparency, because no reasons are given for many of the analytical choices that have to be made in developing a model. Indeed, one may suspect that the widespread availability of powerful statistical software has tempted many researchers to simply run a standard model, without reflecting on whether such a model is the best for the data at hand.

Lack of objectivity and transparency is likely to be a problem in accident modelling, analysis of accidents at hazardous road locations, impact assessment and in-depth studies of accidents. It is less likely to be a problem in road safety audits and inspections and road protection scoring, although as already noted the EuroRAP protocol used in road protection scoring is not public and the scores are therefore not easy to replicate.

3.6 *Ease of updating tool and results based on it*

Safety management of roads is a continuous activity. The evaluation tools that support road safety management therefore have to be used repeatedly in order to keep track of emerging road safety problems to enable these to be treated effectively. There is, accordingly, a need for updating the tools and the results based on them.

Evaluation tools that rely on data kept in road data banks are likely to be more difficult to update than tools that do not rely on such data. Consider, as an example, network screening. In its most advanced form, network screening relies on the output of accident prediction models. These models, in turn, rely on data in road data banks. These data are not always updated regularly. In Norway, a detailed inventory of access points (driveways) along national roads was made in 1977. It has since not been updated systematically, and now the registry must be regarded as outdated and too unreliable to be used as a source of data in accident modelling. This is clearly a problem, as several analyses based on the registry, made shortly after it was created, found that access point density (number of access roads per kilometre of road) had a major effect on road safety. Thus, not including this variable in an accident prediction model could create a substantial omitted variable bias.

Accident prediction models tend not to be updated systematically. Outdated models are a problem (Hirst, Mountain and Maher 2004).

3.7 *Benefit-cost ratio of evaluation tools*

Use of the safety evaluation tools may be influenced not just by their complexity and data requirements, but also by costs and benefits associated with use of the tools. There are few

cost-benefit analyses of the safety management evaluation tools included in this report, but Elvik, Høye, Vaa and Sørensen (2009) quote some analyses of road safety audit and road safety inspections. The following is a summary of these analyses.

Cost-benefit analyses of road safety audits have been reported in Denmark, Germany, Norway and Australia. The benefit-cost ratios vary from about 1.34 in Norway to up to 242 in Australia. In Australia the benefit-cost ratio was found to be greater than 10 for approximately 75% of all implemented recommendations (Macaulay and Mcinerney, 2002).

In Australia the benefit-cost ratio for road safety inspections has also been estimated. It is between 2.4 and 84. About 47% of all the recommendations had a benefit-cost ratio over five (Macaulay and Mcinerney, 2002).

4 Current use of evaluation tools in Europe

This chapter presents a survey of the current use of evaluation tools for safety management of roads in Europe. The survey was conducted by means of questionnaire (Appendix 1). The questionnaire is first presented and briefly discussed. Then the answers to the questionnaire are presented. The questionnaire was distributed by the CEDR working group on road safety, whose assistance is gratefully acknowledged.

4.1 *The questionnaire*

The questionnaire consisted of two main parts. The first part was intended to collect information regarding current use of the ten safety evaluation tools presented in Chapter 2. The second part was intended to help assess the applicability of evaluation tools in terms of six criteria that describe the ease of use. These six criteria were discussed in Chapter 3 (benefit-cost ratio was not one of these criteria).

In part 1, each country provided information about whether it currently uses any of the ten evaluation tools described in Chapter 2 (the Dutch algorithm for determining speed limits was not listed explicitly). Additional questions were asked to provide more detail regarding the use of accident modelling, road protection scoring, road safety impact assessment and monitoring of road user behaviour. These tools have been developed recently, and the additional questions were intended to probe what level of ambition countries have in applying these tools.

In part 2, each country rated the demands for using each of the evaluation tools in terms of need for original data, need for standard procedure, reporting requirements, need for training and specialised skills, objectivity and transparency and ease of updating.

4.2 *Coding answers to the questionnaire*

Responses were received from the following eighteen countries:

Austria, Cyprus, Denmark, Estonia, Finland, France, Germany, Great Britain, Hungary, Iceland, Ireland, Luxembourg, Netherlands, Norway, Portugal, Slovenia, Spain and Sweden.

These countries can be considered as a representative cross section of Europe, including both small and large countries, countries in the north and south of Europe, as well as central and eastern European countries. The sample, although small, does permit exploratory analyses of the relationship between the use of the safety management tools and safety performance.

For the purpose of these analyses, the responses to the questionnaire were coded. A Table providing the detailed response of each country is included as Appendix 2. With respect to the use of the ten listed evaluation tools, a code of 2 was assigned if a country reported that it performed road safety audits, safety inspections, network screening or impact assessment. These four tools are mandatory according to the EU-Directive on road infrastructure safety management. A maximum of 8 points could be attained if all these tools were used. For the other six tools, a code of 1 was assigned if a tool was used (maximum score = 6). If a country reported using any additional tool, in addition to the 10 tools listed in questionnaire, an additional point was earned. Based on this coding, use of the safety management tools was measured on a scale ranging from 0 to 15.

Answers to the supplementary questions regarding the use of four of the tools were coded as follows.

1. Accident models: If accidents models were updated regularly, a code of 1 was assigned; if models were not updated regularly, a code of 0 was assigned. Models including multiple independent variables were coded as 2; models including only

traffic volume as an explanatory variable were coded 1. Thus, countries could earn 3 points if they used comprehensive accident models that were updated regularly. Countries not using accident models scored 0 on the supplementary question regarding the use of accident models. The scores are ordinal only and indicate whether accident models are used or not, and, if used, the range of variables included in the models.

2. Road protection scoring (RPS): A score of 1 was assigned if road protection scoring was reported to influence the use of safety measures; otherwise a score of 0 was assigned.
3. Road safety impact assessment: With respect to road safety impact assessment, a score of 2 was assigned if these assessments comprised both large investments and minor treatments; if impact assessments were made only of major projects, a score of 1 was assigned. A score of 1 was assigned if road safety impact assessments were updated regularly; if not a score of 0 was assigned. A score of 1 was assigned if the validity of road safety impact assessments was evaluated; otherwise a score of 0 was assigned.

Thus countries could earn 8 points in total depending on their use of accident modeling, road protection scoring and road safety impact assessment: 3 for accident modeling, 1 for road protection scoring and 4 for road safety impact assessment.

4. The monitoring of road user behaviour was coded as follows: 2 if speed was monitored, 1 if the use of crash helmets was monitored, 2 if the use of seat belts was monitored, 1 if the use of mobile phones was monitored, 1 if the following distances were monitored and 2 if drinking and driving was monitored. Drinking and driving was not listed in the questionnaire, but countries had the option of reporting whether they monitored other types of behaviour than those listed. Some countries answered that drinking and driving was monitored. A score of 2 was assigned to speed, seat belt wearing and drinking and driving because these types of behaviour are known to contribute more to road accidents than the other types of behaviour listed in the questionnaire.

In total, countries could earn 9 points with respect to the monitoring of road user behaviour.

An index for the use of safety management tools was thus developed with a maximum score of 32. The components of the index were:

1. Use of the ten listed safety management evaluation tools plus any other tool mentioned explicitly (maximum 15 points).
2. Use of accident modelling, road protection scoring and road safety impact assessment (maximum 8 points).
3. Monitoring of road user behaviour (maximum 9 points).

Table 1 reports the scores each country obtained with respect to the components of the index.


The total score obtained ranges from 12 (Luxembourg) to 31 (Netherlands). Some of the scores are as expected, like the high score of the Netherlands. Other findings are somewhat more surprising, like the comparatively low score Sweden, which is among the safest countries in Europe. Germany scored rather low – 17 – while France scored 25. Both these countries have accomplished substantial improvements in road safety in recent years, although the progress made in France has attracted a greater international interest than the progress made in Germany.

Table 1: Use of road safety management evaluation tools in a sample of European countries

Country (alphabetically)	Use of ten tools for road safety management (max = 15)	Accident modelling, road protection scoring, road safety impact assessment (max = 8)	Monitoring of road user behaviour (max = 9)	Total score for use of road safety management tools (max = 32)
Austria	13	3	7	23
Cyprus	8	1	6	15
Denmark	12	4	5	21
Estonia	7	0	7	14
Finland	13	7	9	29
France	13	5	7	25
Germany	14	4	3	21
Great Britain	14	6	5	25
Hungary	10	0	8	18
Iceland	12	3	5	20
Ireland	11	4	5	20
Luxembourg	7	0	5	12
Netherlands	15	7	9	31
Norway	13	8	4	25
Portugal	10	6	5	21
Slovenia	13	0	8	21
Spain	14	6	5	25
Sweden	9	7	4	20

4.3 Framework for statistical analysis

Statistical analysis of the answers was based on a simple causal model, shown in Figure 3.

*Figure 3: Causal model underlying statistical analysis*

It was assumed that the likelihood of a country using a specific road safety management evaluation tool depended on the perceived ease of using the tool. If a tool was rated high with respect to data requirements, high with respect to the need for specialised skills and training, etc., it was judged to be less likely to be used. Part 2 of the questionnaire was intended to elicit the perceived level of difficulty of using the various evaluation tools.

Unfortunately, most countries have not interpreted the questionnaire as intended. Most countries not using a certain evaluation tool have not answered part 2 of the questionnaire, and have thus not provided any information regarding their perception of how easy it is to use a certain tool. Besides, for the countries that did answer this part of the questionnaire, the answers display very limited variation. It was nevertheless decided to exploit whatever information could be extracted from the answers to questionnaire in order to assess the first part of the causal chain in Figure 3.

Seven countries – Austria, Germany, Great Britain, Hungary, Luxembourg, Portugal and Slovenia – gave answers that could be used for further analysis. The applicability of the tools was scored on a scale ranging from 1 (easy) to 3 (difficult). A score close to 3 would indicate that a tool was rated as difficult to use; a score close to 1 would indicate that a tool was rated as easy to use. The hypothesis is that the higher the score, the less likely a tool is to be used. A total of 50 mean scores were obtained for tools that were used. A total of 15 mean scores were obtained for tools that were not used.

The overall mean of the applicability score for tools that were not used was 2.42. The overall mean of the applicability score for tools that were used was 2.19. Tools that were used were therefore rated as easier to apply than tools that were not used. Figure 4 shows the distribution of applicability scores for tools that were used and tools that were not used.

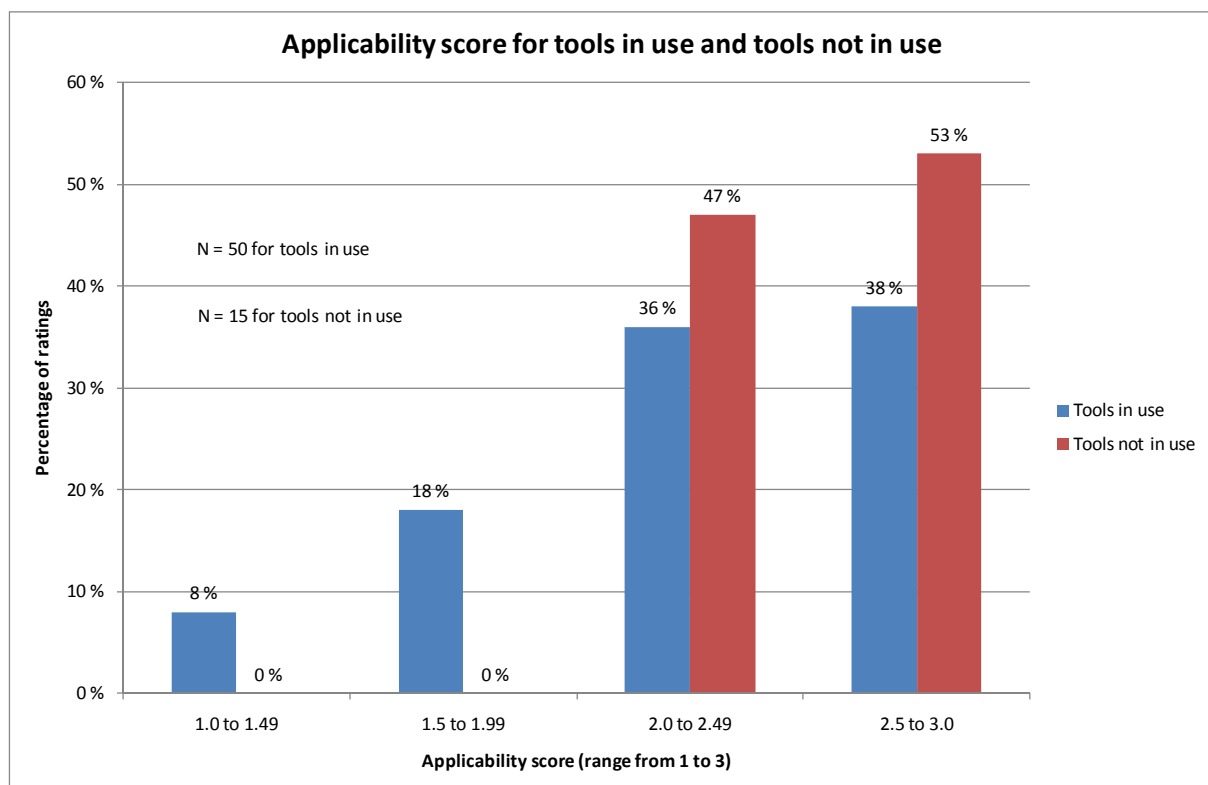


Figure 4: Applicability scores for tools that were used and tools that were not used

It is seen that tools that were not used, were rated higher according to the applicability score, i.e. they were regarded as more demanding to use. A Chi-square test of the difference in applicability scores between tools in use and tools not in use was, however, not statistically significant (Chi-square = 4.895; degrees of freedom = 3; $p = 0.1796$).

The basic hypothesis regarding the relationship between use of the road safety management tools and road safety performance is that the more extensive use a country makes of the road safety management tools, the better will be its road safety performance. The extent of use of the tools is measured by the index values given in Table 1. Road safety performance

can be measured in a number of ways. The following four indicators of road safety performance (dependent variable) were used in the analysis:

1. Fatality rate in 2008. This was measured as the number of road accident fatalities per billion km of travel performed by means of cars and buses. Data were taken from Eurostat (European Union 2010).
2. Trend in the number of fatalities between 1990 and 2009. For each country, the count of road accident fatalities each year from 1990 to 2009 was plotted and an exponential curve, showing the mean annual percentage change in the number of fatalities, was fitted to the data. Figure 5 shows an example of such a curve. Appendix 3 contains similar curves for all countries included in this study.
3. Trend in fatality rate from 1990 to 2008. Fatality rate was defined as the number of fatalities per billion km of travel performed by means of cars and buses. The trend in fatality rate was indicated by the mean annual percentage decline in fatality rate between 1990 and 2008.
4. Change in trend in fatality rate from 1990-2000 to 2000-2008. The annual percentage decline in fatality rate during 2000-2008 was compared to the annual percentage decline in fatality rate between 1990 and 2000 to determine if the rate of progress in improving road safety has slowed down or speeded up.

With respect to the first indicator, it was expected that an extensive use of safety management tools is associated with a low fatality rate. This indicator is rather weak, however, as fatality rates are influenced by very many factors and there are historical differences between countries that have not been fully eliminated, although the differences in fatality rate between countries have tended to become smaller over time.

All countries, except Iceland, have experienced a decline in the number of road accident fatalities between 1990 and 2009. For Iceland, the annual number of fatalities, varying roughly between 10 and 30, was too small to reliably determine any trend. Figure 5 shows a typical example of the trend between 1990 and 2009.

All long term trends were summarised in terms of an exponential function showing the mean annual percentage reduction of the number of fatalities. Although it is clear that other functions, such as polynomials, would often fit the data points better than an exponential function, the exponential function was preferred because it is simple and can be interpreted as a learning curve, with the annual percentage change indicating how fast learning takes place. Progress in reducing accident rates can often be adequately modelled in terms of an exponential function (Duffey and Saull 2003, Evans 2003).

It was assumed that an extensive use of road safety management tools is associated with a larger annual percentage reduction of the number of fatalities than a less extensive use of road safety management tools.

In nearly all countries, traffic is growing. The faster the growth in traffic, the more difficult it is to reduce the number of fatalities. In Figure 5, for example, it is seen that the decline in the number of fatalities in Sweden stopped in 1998. It was not until 2003 that a lower number of fatalities was recorded. Similar periods of stagnation are seen in many countries. To describe the long term trend in fatality rate (fatalities per billion km of travel), the fitted values for the number of fatalities according to the exponential function were used as numerator of the rate, rather than the recorded number in a particular year. Thus, for Sweden the recorded number in 1990 was above the fitted value. The same applied to the year 2000, whereas in 2008, the recorded number of fatalities was below the fitted value according to the exponential function. Most of the differences between the annual recorded numbers and the fitted numbers are the result of random variation. To minimise the influence of random variation on the statistical analysis, change in fatality rate was calculated on the basis of the fitted number of fatalities in the years 1990, 2000 and 2008, rather than the recorded numbers for those years. There was a tendency in all countries for fatality rate to be reduced. This trend was summarised in terms of the annual percentage reduction of fatality rate.

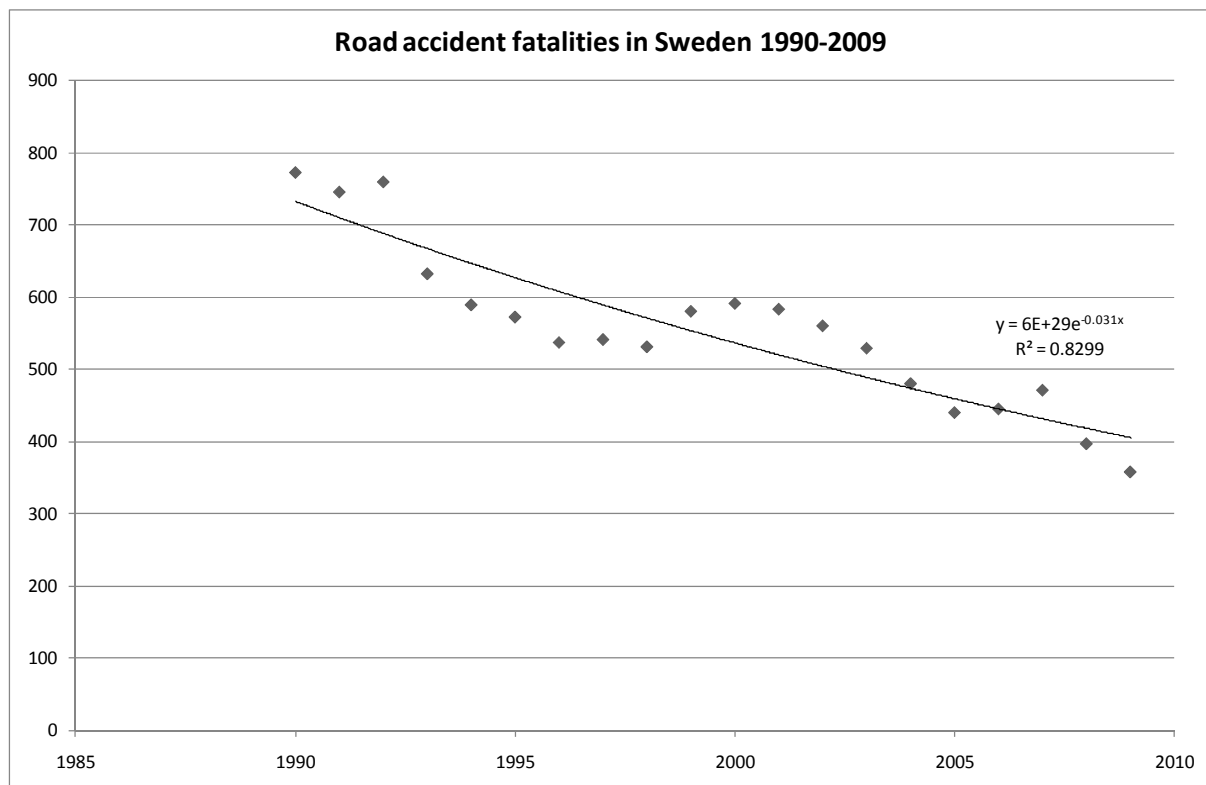


Figure 5: Road accident fatalities in Sweden 1990-2009

It was expected that the more extensive use a country makes of the safety management tools, the larger will be its annual reduction of the fatality rate. It is, of course logically possible for the fatality rate to be reduced even if the number of fatalities is not reduced. Since fatality rate indicates how safe travel is per kilometre travelled, it is still possible to say that safety has been improved.

However, not all the safety management tools have come into use at the same time. Thus, the identification and treatment of hazardous road locations – traditionally referred to as black spot treatment – started to be done systematically in Norway around 1970. Road safety audits started to be performed in the 1990s and safety inspections were only performed to any significant extent after 2000. Accident modelling was also adopted as an element of road safety management in Norway after 2000. Similar stories could be told for many of the other countries included in this study.

If the use of the safety management tools has expanded over time, one might also expect that the rate of decline in fatality rate has increased over time. To test whether this is in fact the case, the annual decline in fatality rate between 2000 and 2008 was compared to the annual decline in fatality rate between 1990 and 2000. It was expected that the more extensive use a country currently makes of the safety evaluation tools, the more likely it is to have improved its performance over time, by accomplishing a higher annual decline in fatality rate after the year 2000 than before the year 2000.

To summarise, if using road safety management evaluation tools helps improve road safety performance, it is expected that:

1. The more extensive the use of the management tools, the lower the current road accident fatality rate (a negative relationship).
2. The more extensive the use of the management tools, the larger the annual reduction of the number of fatalities (a positive relationship).

3. The more extensive the use of the management tools, the larger the annual reduction of fatality rate after the year 2000 (a positive relationship).
4. The more extensive the use of the management tools, the more the rate of decline in fatality rate has increased from before the year 2000 to after the year 2000 (a positive relationship).

Annual reductions of fatalities and fatality rate are stated as positive numbers – the larger the number, the larger the rate of decline. Hence, a positive relationship is expected between use of the safety management tools and these rates. Similarly, if a country had a 3.5 percent annual decline in fatality rate between 1990 and 2000 and improved this rate to 3.9 percent per year after 2000, the ratio between these numbers, i.e. 3.9/3.5 shows the rate of improvement. If the ratio is greater than 1, progress is now faster than it was before the year 2000. If the ratio is less than 1, progress is now slower than it was before the year 2000.

Statistical analysis has been performed both for un-weighted data and weighted data. In the analysis of un-weighted data, each data point is treated as equally reliable. In other words, the 2008 fatality rate in a small country is treated as being equally reliable as estimates of the fatality rate in a larger country. This is clearly not correct, as a fatality rate based on, say, 200 fatalities has a considerably larger uncertainty than a fatality rate based on, for example, 4000 fatalities. Fatality rates for 2008 have, accordingly, been weighted in proportion to the number of fatalities used when estimating them. Countries recording less than 100 fatalities in 2008, i.e. Cyprus, Iceland and Luxembourg were omitted from the analysis using fatality rate in 2008 as the dependent variable. Cyprus and Luxembourg were included in the analyses using trend in the number of fatalities and fatality rate as the dependent variable. Iceland was omitted from all analyses.

For the analyses relying on trend data, the same set of statistical weights was applied to all analyses. These weights were defined as follows:

$$\text{Statistical weight} = 1/(1 - R^2)$$

R-squared is the squared correlation coefficient showing the goodness-of-fit of the exponential trend line to the actual fatality counts between 1990 and 2009. In figure 5 above, this was 0.8299 for Sweden. The statistical weight for Sweden thus becomes $1/0.1701 = 5.88$. The statistical weights are thus inversely proportional to the residual variance surrounding the fitted trend line. The smaller this variance, the more closely data points for each year will be to the trend line. In general, optimal statistical weights are proportional to the precision of data points.

The analyses are based on either 14 countries (fatality rate in 2008) or 17 countries (all other analyses). It is clear that in such a small sample, it is difficult to obtain very precise estimates of the statistical relationships between variables. Moreover, road safety performance is influenced by many factors, not just use of the safety management tools that are the focus of this report. Unfortunately, it is difficult to control for very many potentially confounding variables in a small sample. As a rule-of-thumb, the ratio of the number of observations to the number of variables should not be less than 10. Hence, in a sample of 17, at most 2 independent variables can be used in a regression analysis. To obtain some degree of control for confounding, the analyses therefore included one independent variable in addition to the score for use of the evaluation tools. Thus, the general model was:

$$\text{Safety performance} = \text{constant term} + \text{score for use of tools} + \text{confounding variable} + \text{error}$$

Standard least squares linear regression was used, as all variables involved can be treated as approximately continuous, measured at the interval- or ratio level of measurement. The following two potentially confounding variables were used, each in two of the four analyses that were made:

1. Governance indicator
2. Traffic growth

The governance indicator was used in the analyses that used fatality rate in 2008 as

dependent variable and in the analyses that used mean annual percentage decline in fatality rate from 1900 to 2008 as dependent variable. The governance indicator has been developed by the World Bank (Kaufmann, Kraay and Mastruzzi 2010). It is intended to show how well the government of a country functions. Governance is defined as: The traditions and institutions by which authority in a country is exercised. This includes (a) the process by which governments are selected, monitored and replaced; (b) the capacity of the government to effectively formulate and implement sound policies; and (c) the respect of citizens and the state for the institutions that govern economic and social interactions among them. There are six indicators of governance:

1. Voice and accountability (free elections, free media, freedom of speech)
2. Political stability and absence of violence or terrorism (no civil strife, acts of terrorism, military involvement in politics, etc.)
3. Government effectiveness (quality of public services)
4. Regulatory quality (regulations that promote private sector development)
5. Rule of law (quality of enforcement, independence of courts, etc.)
6. Control of corruption (absence of corruption)

Each country is assigned a score on each indicator. Countries are then ranked and their scores converted to the percentage of the best score. Thus a country that scores best on any indicator gets the value of 100 for that indicator. The closer to 100, the better the governance. In this report, the mean of the scores for the six indicators was used.

Traffic growth was estimated based on data provided by Eurostat. Traffic growth was stated as the mean annual percentage growth in vehicle kilometres driven for the periods 1990-2008, 1990-2000 and 2000-2008. Traffic growth was positive in all countries except Hungary, where, according to Eurostat, traffic declined both from 1900 to 2000 and from 2000 to 2008. Mean annual percentage traffic growth was used in the analysis using mean annual percentage decline in the number of fatalities as dependent variable. Change in mean annual traffic growth from 1990-2000 to 2000-2008 was used in the analyses that used change in the annual percentage decline in fatality rate as dependent variable. Thus, if traffic grew on average by 1.5 percent per year from 1990 to 2000, and by 1.2 percent per year from 2000 to 2008, this variable took the value of $1.2/1.5 = 0.8$. Values less than 1 indicate that traffic growth slows down; values greater than 1 indicate that traffic growth speeds up.

4.4 Results of analysis

The results of the analysis are reported in Table 2. All analyses were performed using SPSS version 18.

Table 2: Results of analysis of relationship between use of road safety management tools and road safety performance

Dependent variable (Y)	Type of model	Variable	Coefficient	Standard error	P-value
Fatality rate	Not weighted	Constant term	33.804	8.031	0.001
		($R^2 = 0.537$)			
		Score for tools	-0.248	0.183	0.200
	Weighted	Governance score	-0.241	0.104	0.038
		Constant term	32.602	2.469	0.000
		($R^2 = 0.476$)			
Fatality trend	Not weighted	Score for tools	-0.336	0.065	0.000
		Governance score	-0.216	0.032	0.000
		Constant term	3.657	2.264	0.128
	Weighted	($R^2 = 0.038$)			
		Score for tools	-0.002	0.089	0.984
		Traffic growth	0.200	0.192	0.539
Rate trend	Not weighted	Constant term	4.181	0.911	0.000
		($R^2 = 0.179$)			
		Score for tools	-0.007	0.037	0.840
	Weighted	Traffic growth	0.447	0.123	0.000
		Constant term	17.559	5.646	0.008
		($R^2 = 0.273$)			
Trend change	Not weighted	Score for tools	-0.094	0.100	0.360
		Governance score	-0.112	0.067	0.116
		Constant term	22.171	2.646	0.000
	Weighted	($R^2 = 0.334$)			
		Score for tools	-0.091	0.049	0.064
		Governance score	-0.157	0.032	0.000
Trend change	Not weighted	Constant term	0.884	0.145	0.000
		($R^2 = 0.590$)			
		Score for tools	-0.004	0.007	0.594
	Weighted	Change in growth	0.150	0.035	0.001
		Constant term	0.945	0.062	0.000
		($R^2 = 0.642$)			
		Score for tools	-0.005	0.003	0.087
		Change in growth	0.124	0.011	0.000

In general, there are small differences in results when the non-weighted analyses are compared to the weighted analyses.

The results of the analysis using fatality rate as dependent variable are consistent with the hypotheses. The higher the score for use of tools, the lower the fatality rate (negative coefficient). Likewise, the better the governance, the lower the fatality rate.

The results of the analyses using trend in the number of fatalities (fatality trend), trend in fatality rate (rate trend), and change in the trend in fatality rate (trend change) are all inconsistent with the hypotheses. All the coefficients have the opposite sign of what was expected. It should be noted, though, that the coefficient for score for use of tools is in most cases not statistically significant at conventional levels. It is therefore not correct to claim that there is an adverse effect on safety of using the safety management tools. At best, one can conclude that this analysis has not succeeded in reliably estimating the relationship between use of the safety management tools and safety performance.

4.5 Discussion of findings

The main impression from the analysis made is that only a weak and noisy relationship can be found between the use of road safety management evaluation tools and road safety performance. Most of the findings were contrary to prior expectations, apparently suggesting that the more road safety management tools a country uses the worse it performs in terms of road safety.

It is difficult to interpret these findings. There is no strong support for the general hypothesis that the more extensive use a country makes of formal road safety management tools, the better it will perform in improving road safety. However, the results of analysis do not amount to a clear refutation of this hypothesis. It is a mixed picture: some results support the hypothesis, others go against it.

In general, there are two main interpretations of research results: methodological and substantive. A methodological interpretation usually points to weaknesses in data and method and often concludes that findings must be rejected for these or other methodological reasons. By contrast, a substantive interpretation often argues that findings represent true causal relationships.

It is difficult to see how a substantive interpretation of the findings can be defended. The relationships are weak and noisy and point in different directions for the different indicators of road safety performance. This hardly suggests that the analysis has uncovered any meaningful causal relationships.

As for methodological interpretations, the three most obvious weaknesses of the study are:

1. The variable indicating the use of the safety management tools may be too crude. It merely counts the number of tools used and does not address whether the tools are used in a rudimentary form or in a version closer to the state-of-the-art. It is reasonable to assume that applying the tools in a form that is close to the state-of-the-art could have a greater influence on road safety performance than using simpler versions of the tools.
2. The sample of countries is small. The analyses were based on data referring to between 15 and 17 countries. Clearly, any statistical relationship would have to be very strong to attain statistical significance in such a small sample. Moreover, the possibility of self-selection bias cannot be ruled out. This means that the use of the safety management tools is related to prior interest in and performance in improving road safety. In other words: The tools tends to be used by those countries that took a strong interest in improving road safety even before all the tools had been developed to their current state-of-the-art. These countries would probably have continued to perform well in improving road safety even if they did not apply all the safety management tools included in this study.
3. The study did not control very well for potentially confounding variables. Due to the small sample, only one potentially confounding variable was included in each of the analyses. Road safety performance is likely to be related to very many influencing factors. In international comparisons, one quickly runs into identification problems (Manski, 1995), i.e. there are too many variables and too few units of observation to permit the effects of the variables to be meaningfully estimated.

The analyses reported in this chapter should not be interpreted as supporting less use of the safety management tools. On the contrary, it is likely that these tools can become more useful if the use of them is developed to become closer to the state-of-the-art. How to develop the tools to bring them closer to the state-of-the-art is the topic of the next chapter.

The state-of-the-art and steps to improve road safety management evaluation tools in Europe

This chapter briefly surveys the state-of-the-art for the different road safety management evaluation tools and outlines steps that can be taken to bring current practice in Europe closer to the state of the art.

5.1 *Improving road safety audits*

Road safety audits are applied in many countries, but not all. Interestingly, Sweden – which is generally regarded as a leading country in road safety – does not carry out road safety audits for national roads. Such audits are used for municipal roads, but they are voluntary and their use depends on local discretion.

Current guidelines for road safety audits are often fairly detailed. These guidelines embody a broad perspective on road safety, that goes beyond merely checking whether a certain road design conforms with current design standards. As an example, the Norwegian guidelines for road safety audits calls on auditors to check if the width of driving lanes and shoulders is “sufficient” (Statens vegvesen, Håndbok 222, 2005). The answer to this question should depend not only on design standards, but also on a consideration of what the actual conditions for operating the road will be. Design standards will normally specify a certain lane width, but there is no well-established scientific basis for claiming that slightly wider, or slightly narrower, lanes will have a major impact on safety.

However, in several countries, design standards are not defined on the basis of road safety criteria alone. Quality measuring of a road itinerary involves other aspects besides safety, such as adequacy to its purpose (which is related to road function), aesthetics, economy, environmental impact, durability, ease of construction and maintenance, and overall whole life cycle costs. Road design standards result from a compromise between those various (sometimes mismatching) aspects. Furthermore, road design standards are stated as general rules of thumb intended for application in diverse situations; in some countries deviations to these criteria are allowed, when local conditions do not permit full compliance with design standards. It also happens that some safety criteria included in road design standards are not explicitly stated in terms of safety and that issues relevant pedestrian, bicycle and horse riders’ safety problems may be more incompletely covered than the ones relevant for car and truck drivers. Moreover, it is not necessarily correct to assume that current design standards for roads are to a major extent based on recent knowledge. These standards have evolved gradually during a very long period and may be based more on tradition and engineering conventions than on state-of-the-art road safety research.

With this background there is merit in the analysis of road design schemes, with the purpose of detecting safety issues arising from the application of general rules of thumb to the local conditions of an intended future road layout.

Thus, checklists used in road safety audits are usually not based strictly on formal design standards for roads, but refer to a broader consideration of safety issues.

Knowledge about the actual effects on safety of road safety audits is almost non-existent. The few estimates that can be found tend to be hypothetical, meaning that the studies do not compare road schemes that were audited to similar road schemes that were not audited in terms of the accident experience after the schemes were opened to traffic. Rather, the studies (see e.g. Schelling 1995, Brownfield and Faber 1995) apply engineering judgement to assess what the safety of a road might have been had it not been audited.

There is a need for more rigorous evaluation studies to validate road safety audits. If it is not possible to perform controlled studies employing the design outlined above, a second best solution might be to conduct before-and-after studies of safety inspections. These are in many respects analogous to road safety audits, but apply to an existing road which has an

accident history that can be used as a source of data in an evaluation study. Care should of course be taken to control for important potentially confounding factors like regression-to-the-mean, long-term trends in accident and local changes in traffic volume.

The following steps are proposed to improve the quality of road safety audits:

1. Conduct systematic evaluation studies designed to assess the impacts of road safety audits on accidents. Such studies should ideally speaking be designed as controlled trials, in which pairs of similar road schemes are formed – one member in each pair is audited, the other is not. Following opening to traffic, accident experience is compared. A second best design might be to perform before-and-after studies of safety inspections, to obtain estimates of the effects on accidents of minor measures that are identical to, or closely resemble, those proposed in road safety audits of road schemes similar to the roads that have been inspected.
2. An archive of all road safety audits should be kept and periodically analysed. This will inform highway agencies about learning associated with road safety audits. If road planners are learning, recent audit reports should contain fewer remarks than older audit reports. Particular attention should be paid to whether certain items or remarks are repeated often in audit reports. This indicates that learning does not take place, or that the audit remarks are very difficult for road planners to implement.

Countries that are not using road safety audits today might consider introducing them once the steps outlined above have been taken.

5.2 Improving safety inspections

The remarks made above with respect to road safety audits apply to a large extent to safety inspections as well. An attempt to assess the likely effects on safety of safety inspections was made in RIPCORDER-ISEREST (Elvik 2006B), but it was to a large extent based on studies that did not evaluate safety inspections as such. The review made for RIPCORDER-ISEREST also proposed best practice guidelines for safety inspections (Elvik 2006B). These guidelines are repeated here:

1. The elements to be included in safety inspections should be known to be risk factors for accidents or injuries.
2. Inspections should be standardised and designed to ensure that all elements included are covered and are assessed in an objective manner. For this purpose, developing check lists may be of help.
3. The list of elements to be included in safety inspections (check lists) should include those that are recognised as important. The following elements should be included in all safety inspections:
 - a. The quality of traffic signs, with respect to the need for them, whether they are correctly placed and whether they are legible in the dark.
 - b. The quality of road markings, in particular whether the road markings are visible and are consistent with traffic signs.
 - c. The quality of the road surface, in particular with respect to friction and evenness.
 - d. Sight distances and the presence of permanent or temporary obstacles that prevent timely observation of the road or other road users.
 - e. The presence of traffic hazards in the near surroundings of the road, such as trees, exposed rocks, drainage pipes, etc.
 - f. Aspects of traffic operation, in particular if road users adapt their speed sufficiently to local conditions.

4. For each item included in an inspection, a standardised assessment should be made by applying the following categories:
 - a. The item represents a traffic hazard that should be treated immediately. A specific treatment should then be proposed.
 - b. The item is not in a perfectly good condition, but no short term action is needed to correct it. Further observation is recommended.
 - c. The item is in good condition.
5. Inspections should report their findings and propose safety measures by means of standardised reports.
6. Inspectors should be formally qualified for their job. They should meet regularly to exchange experiences and to ensure a uniform application of safety standards in inspections.
7. There should be a follow-up of inspections after some time to check if the proposed measures have been implemented or not.

To this list can be added the need for evaluating the effects on safety of safety inspections and the measures taken as a result of them. Before-and-after studies employing the Empirical Bayes design are well suited for this purpose (Hauer 1997).

5.3 Improving network screening

Various approaches that can be taken to network screening were examined extensively in RIPCORDER-ISEREST (Elvik 2007B). The review found that current approaches differ between countries. Steps that can be taken to bring current practice closer to the state-of-the-art include:

1. Develop accident prediction models that can be used as an element of network screening.
2. Develop an exhaustive list of roadway elements (sections, junctions, curves, bridges, tunnels, etc) to which screening is applied. This is to prevent screening from, for example, identifying a large number of junctions as abnormal, simply because there tend to be more accidents in junctions than on road sections of similar length (say 100 metres).
3. Develop a criterion of deviancy for each type of roadway element; with respect to road sections, this criterion should take the length of road sections into account.
4. Estimate the expected number of accidents for each roadway element by means of the empirical Bayes method.
5. Apply the peaks-and-profiles algorithm in order to identify longer road sections that have a higher than normal expected number of accidents.
6. Survey a broad set of potentially effective road safety measures that can improve safety for elements that have substandard safety.

In addition to these points, it is important to conduct network screening regularly in order to update results.

5.4 Improving accident modelling

There is no doubt that the field of accident modelling has made impressive progress in recent years. Some of the recent models are statistically very advanced and make a very efficient use of available data. The understanding of potentially confounding factors in accident modelling has also increased. It seems clear that many of the accident models published the

last 10-15 years have increased our understanding of factors that are associated with accidents.

It is nevertheless not possible to applaud these impressive contributions without pointing out some common shortcomings of accident models that need to be corrected in order to make these models more valuable in increasing knowledge. More specifically, the following steps should be taken:

1. Researchers need to be explicit about whether they want the model to show causal relationships between variables or merely statistical associations. If causal relationships are sought, it becomes important to control for confounding factors when developing a model.
2. The most important potentially confounding factors in multivariate accident models include (Elvik 2011):
 - a. Small sample and/or low mean value bias
 - b. Bias due to aggregation, averaging or incompleteness in data
 - c. Presence of outlying data points
 - d. Inappropriate choice of dependent variable
 - e. Endogeneity of safety treatment
 - f. Wrong functional form for effects of independent variables
 - g. Co-linearity among explanatory variables
 - h. Omitted variable bias
 - i. Misspecification of the structure of systematic variation in accidents and residual terms
 - j. Mixing levels of accident severity
 - k. Inappropriate model form
3. Confounding factors that are likely to be present in many accident models include:
 - a. Bias due to aggregation, averaging or incompleteness of data. In particular AADT as a measure of traffic volume may be biased both because it is an average, it is an aggregate (of the various types of vehicles that make up traffic) and it is very often incomplete (pedestrians and cyclists are rarely included). Accident reporting is always incomplete; however this is not a problem that can be solved by statistical estimation only.
 - b. Wrong functional form for effects of independent variables. Most models tend to rely on the assumption that all relationships are monotonic. Functional forms ought to be tested in an exploratory analysis.
 - c. Omitted variable bias. Pedestrian and cyclist volumes are very often omitted. Variables describing road user behaviour are also very rarely included in accident models.
 - d. Mixing levels of accident severity. As shown in the discussion above, mixing levels of accident severity can produce results that are almost impossible to interpret. If separate models cannot be fitted for accidents at each level of severity, then at least accident severity ought to be included as a variable in the model.
 - e. Inappropriate model form. A dual state model should not be used merely because it happens to be the case that it fits the data better than a single state model. A reason should always be given for choosing a dual state model. Models implying a zero-state, i.e. a state in which the expected number of accidents is zero or very close to it, have no substantive meaning and should

never be used.

4. In addition to controlling for confounding factors, establishing causality requires that:
 - a. One or more mechanisms that generate the statistical relationships between variables be identified, and
 - b. The shape of the statistical relationships is plausible in view of relevant background knowledge, which includes laws of physics, laws of human perception and information processing, traffic flow theory, and other well-established elements of knowledge gained in engineering and related sciences.
5. The value of replication and accumulation of knowledge needs to be recognised. It is only by fitting a set of identical or comparable models that the results can be compared and possibly synthesised by means of meta-analysis.

At present, it has to be concluded that few accident models have dealt adequately with these issues. Therefore, these models do not contribute as much to knowledge as they could do by addressing the points listed above.

5.5 Improving road protection scoring

The most widely applied tool for road protection scoring appears to be the EuroRAP scoring system. This system takes into consideration a number of factors that are known to influence the severity of accidents, but the scoring system has not been validated. By validation is meant an empirical study that shows actual accident severity for road sections that are assigned different star ratings in EuroRAP.

In a recent study Pardillo-Mayora et al. (2010) validated a roadside safety index for Spain based on the following variables:

1. Slope of roadside, with five values ranging from 1:6 (safest) to 1:2 (most dangerous),
2. Clear zone along roadside, with four values ranging from no obstacles within 10 metres from the road (safest) to obstacles within 3 metres from the road (most dangerous)
3. Presence of safety barrier, with three values with no barrier as safest and a non-approved barrier as most hazardous,
4. Alignment, with straight as safest and curve as most hazardous.

Based on combinations of values for these variables, five categories of road were formed. For each category, accident severity was stated in terms of the percentage of all reported accidents that were fatal. Figure 6 shows the results.

It can be seen that group 5, which is characterised by sideslopes steeper than 1:3, fixed obstacles closer than 5 metres from the edge of the road, no safety barrier and the presence of horizontal curves, differs markedly from the other four groups. While the increase in accident severity as one proceeds from group 1 to group 4 is fairly constant, there is a jump in group 5.

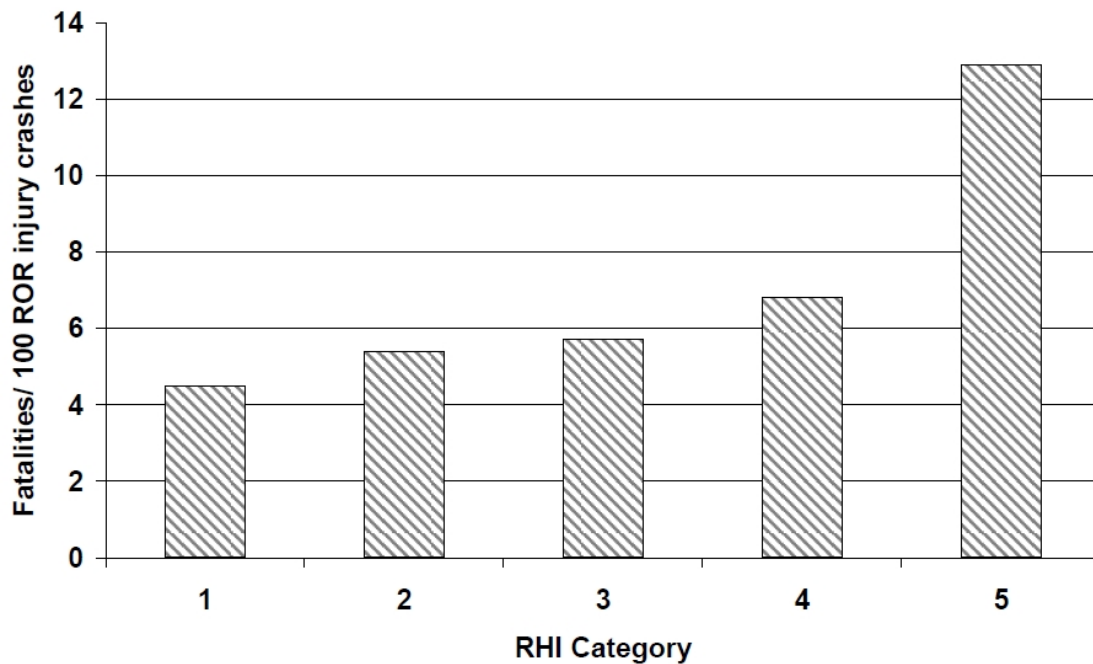


Figure 6: Accident severity for five groups of roads in Spain formed by combining values for roadside slope, size of clear zone, presence of safety barrier and road alignment. Source: Pardillo-Mayora et al. 2010

If one imagines the categories 1 to 5 converted to a star rating, the scale would be somewhat difficult to interpret, as the steps between adjacent stars are not equally large. It would be interesting to perform a similar validation of the EuroRAP road protection scoring system.

5.6 Improving identification and analysis of hazardous road locations

How best to identify and analyse hazardous road locations was analysed in depth in RIPCORDER-ISEREST, and the main findings remain valid. Briefly, to improve current techniques, road administrations ought to:

1. Develop a classification of roadway elements. A list of elements might include:
 - a. Road sections of a given length and given number of lanes
 - b. Junctions with a given number of approaches and type of traffic control
 - c. Interchanges with a given design and ramp configuration
 - d. Horizontal curves with radius in a given range
 - e. Bridges of a given design
 - f. Tunnels by length and geometry
2. For each element, form a population of sites, all members of which can be enumerated.
3. For each element, identify hazardous locations by means of the Empirical Bayes (EB) method. Hazardous locations should be defined as those forming the top 10%, 5% or 2.5% of the distribution of sites according to the EB-estimate of the expected number of accidents.
4. Analyse the presence of risk factors contributing to accidents for each identified site by adopted a case-control approach, in which a safe site which is similar to the

hazardous site forms the control group.

Most countries need to make major changes in their current systems for identifying and analysing hazardous road locations in order to approach the state-of-the-art.

5.7 Improving impact assessment

Impact assessment is a key activity in road safety policy making. It consists of estimating the safety impacts expected by implementing specific road safety measures and the total impacts on safety of introducing a set of road safety measures. As shown by the questionnaire survey, impact assessment is not always performed for minor road safety measures. It is, however, often minor measures that can make the largest contribution to improving road safety.

Table 4 shows an estimate of the potential for reducing the number of fatalities in Norway by means of a number of road-related safety measures (Elvik 2009). For each measure, two alternatives for the extent of its use are given:

1. The measure is used only when benefits exceed costs (in monetary terms).
2. The measure is used to the maximum conceivable extent, no matter what the benefit-cost ratio is.

The concept of “maximum conceivable extent” is of course somewhat imprecise. It has, however, been clearly defined for all the measures included in Table 3.

Table 3: Potential reduction of the annual number of road accident fatalities in Norway by means of road-related safety measures. Source: Elvik 2009

Potential reduction of the annual number of fatalities or serious injuries						
Measure	Measures applied if benefits exceed costs			Measures applied to maximum conceivable extent		
	Number of locations	Fatalities	Serious injuries	Number of locations	Fatalities	Serious injuries
New motorways (freeways)	30	1.8	4.7	350	13.2	33.9
Bypass roads	35	0.2	1.3	190	0.6	3.4
Median guard rail	130	4.7	7.2	500	9.5	14.7
Median rumble strips	155	0.7	1.2	500	1.1	2.0
Guardrail along roadside	610	1.0	3.9	1670	1.3	5.2
Roadside safety treatment	190	0.3	1.1	1670	0.7	2.6
Curve treatments	1750	1.3	3.5	2200	1.4	3.7
Follow-up of inspections	345	3.1	5.3	500	3.5	6.1
New road lighting	3150	7.7	11.0	15840	13.7	19.7
Improving road lighting	380	0.7	1.7	660	0.8	1.9
Roundabouts – three legs	460	1.7	5.3	8735	7.2	23.1
Roundabouts – four legs	325	3.0	12.0	825	4.4	17.5
Upgrading pedestrian crossings	1643	5.4	12.8	2210	5.8	13.6
Pedestrian bridge/tunnel	442	3.3	10.6	1155	4.6	14.6

The number of locations is the length of treated roads in kilometres for the measures that refer to road sections. For measures at junctions or at pedestrian crossings, the number of locations refers to the number of junctions or the number of pedestrian crossings.

It can be seen that major road projects, like building new motorways or bypass roads will only make a comparatively small contribution to reducing the number of fatalities or serious injuries. Upgrading existing roads by means of, for example, road lighting or upgraded pedestrian crossing facilities can make a larger contribution. It is therefore important that road safety impact assessment tries to include all road safety measures, even minor improvements to existing roads.

There are many sources of uncertainty in road safety impact assessments. Elvik (2010B) identifies and discusses ten sources of uncertainty. These are:

1. Random variation in the number of accidents or injuries in the target group of a road safety measure. The target group is the type of accident or injury the measure is intended to influence (e.g. accidents in darkness for road lighting),
2. Incomplete or inaccurate reporting of accidents or injuries in official road accident statistics,
3. Uncertainty about the definition of the target group of accidents or injuries influenced by a road safety measure (e.g. road lighting may influence accidents in daylight as well, not just darkness),
4. Random variation in the effect of a road safety measure on accidents or injuries,
5. Unknown sources of systematic variation in the effect of a road safety measure on accidents or injuries,
6. Unknown duration or stability over time in the effects of a road safety measure,
7. Uncertainty with respect to a potential modification of the effect of a road safety measure when it is combined with other road safety measures in a programme (e.g. are pedestrian reflective devices equally effective on lit roads as on unlit roads?),
8. Uncertainty about the effects of exogenous factors influencing road safety,
9. Uncertainty about the degree to which a road safety measure or set of measures will be implemented to the extent planned,
10. Uncertain monetary valuation of the benefits of reducing accidents or injuries.

The latter source of uncertainty is only relevant if a cost-benefit analysis of road safety measures is performed and the results of the analysis are intended to influence policy making.

It is at the current state of knowledge impossible to quantify all these sources of uncertainty. It is nevertheless important that those sources that can be quantified are quantified, to allow an assessment of which of these sources of uncertainty makes the greatest contribution to overall uncertainty. To improve the quality of road safety impact assessments, the following steps should be taken:

1. Conduct a broad survey of potentially effective road safety measures and include as many of them in an impact assessment as possible.
2. Try to assess as many sources of uncertainty in an impact assessment as available data allow for.
3. Monitor the implementation of road safety measures as well as changes in exogenous factors (i.e. everything other than a road safety programme) that influence road safety.
4. Periodically update road safety impact assessments and check the accuracy of previous assessments.

5.8 Improving the monitoring of road user behaviour

Most countries, certainly in Europe, monitor some form of road user behaviour. However, the types of behaviour that are monitored, and the use of the results varies between countries. The two main reasons for monitoring road user behaviour are to explain changes in the number and severity of accidents and to give an early detection of emerging road safety problems. In principle, many types of behaviour could be monitored. For the purpose of influencing road safety, it is particularly important to monitor violations that contribute to fatalities and injuries. According to estimates made by Elvik (2010C), the following violations make the largest contribution to fatalities and should therefore be monitored:

1. Speeding
2. Drinking and driving
3. Not wearing seat belts
4. Driving under the influence of drugs
5. Violating hours of service and rest regulations for commercial transport

Unfortunately, monitoring all these types of behaviour is difficult. Monitoring speed and seat belt wearing is comparatively easy. It can be done by means of reliable technology or low-cost roadside observations. Monitoring drinking and driving, on the other hand, is very costly and difficult. The best method for obtaining representative data on drinking and driving is to conduct roadside surveys. However, such a survey would normally have to include several thousand drivers, as the incidence of drinking and driving is quite low in many countries. A statistically reliable estimate of the incidence of drinking and driving would therefore require the collection of large amounts of data and fairly sophisticated statistical analysis of these data. Similar difficulties are encountered when trying to monitor driving under the influence of drugs. Compliance with hours of service and rest regulations can be monitored by checking tachographs. These are sometimes tampered with, but tampering can be detected.

Existing data on drinking and driving are very poor and unreliable (Assum and Sørensen 2010B). This is remarkable in view of the fact that drinking and driving is likely to be a major risk factor for accidents and injuries. To improve the monitoring of road user behaviour, the following steps should be taken:

1. Select up to five different types of road user behaviour for regular monitoring. Make the selection on the basis of how much the various types of behaviour are believed to contribute to accidents, fatalities and injuries.
2. Develop a sampling plan for monitoring road user behaviour, ensuring that results are representative for road user behaviour at large.
3. Monitor road user behaviour by means of the same methods for a number of years in order to establish a basis for investigating the relationship between changes in behaviour and changes in the number of accidents, fatalities or injuries.
4. Allow police to make routine checks for alcohol whenever a road user is stopped and checked. Perform such checks as a routine. Use police statistics as an indicator of the incidence of drinking and driving.

5.9 Improving conflict studies

Historically, conflict studies were introduced as a substitute for accidents, to enable road safety evaluation studies to be performed in cases where a low count of accidents made an evaluation based on accidents highly uncertain. To use conflicts as a substitute for accidents, there should ideally speaking be a strong and fairly constant statistical relationship between the number of conflicts and the number of accidents. One would then be able to convert a recorded number of conflicts to an expected number of accidents.

Research has shown that such conversion factors are difficult to establish (Hauer and Gårder 1986). Both the number of conflicts and the number of accidents are greatly influenced by random variation. Besides, in the early days of conflict studies, observation of traffic conflicts depended on human observers and their classification of conflicts by type and severity. Although observers were trained to make the observations as reliable as possible, there was bound to be an element of subjectivity both in the count and classification of conflicts.

This has changed in recent years. In the first place, a connection can be made between specific traffic events and potential conflicts (Elvik, Erke and Christensen 2009). The idea of defining exposure as events that generate the potential for a traffic conflict is not new (Hauer 1982). Events, such as simultaneous arrivals at junctions or pedestrian crossing facilities, can meaningfully be counted and regarded as homogeneous, as opposed to summary measures of exposure, like vehicle kilometres of driving. Defining exposure in terms of countable and reasonably homogeneous events, re-establishes the connection between the concepts of exposure and risk and the concepts of trials and probability in probability theory, from which the statistical analysis of accidents emerged historically. Once exposure can be measured as the potential number of conflicts, a meaningful denominator for estimating a conflict rate exists. This can in turn be related to the accident rate, again using the count of events as the measure of exposure.

In the second place, techniques for observing and analysing data on traffic conflicts have improved substantially in recent years (Svensson and Hydén 2006, Lareshyn, Svensson and Hydén 2010). Conflicts are now registered objectively by means of video cameras, and the analysis of videos has been greatly improved by means of modern techniques for video image analysis. This does not mean that data collection and analysis can be fully automated, nor does it mean that all problems of classification and interpretation have been solved. It has, however, made the study of traffic conflicts more objective than it was before.

Studying traffic conflicts is therefore probably more useful and informative today than it was just a few years ago – provided state-of-the-art techniques are used. It can be a valuable supplement to accident analyses at hazardous road locations and shed light on why these locations become hazardous.

To obtain maximum benefit from conflict studies in road safety management, it is recommended to:

1. Select a set of sites at which the rate of conflicts is monitored continuously. This is intended to establish a baseline rate of conflicts for a number of common traffic situations. Use video to record conflicts and modern image processing techniques to analyse the data.
2. Perform conflict studies at hazardous road locations to supplement accident analyses at these sites, in particular if accident analyses are inconclusive and no clear contributing factors are identified.
3. Determine conversion factors in order to convert a recorded number of conflicts to an estimate of the expected number of accidents.

5.10 Improving in-depth accident studies

In-depth studies of accidents have become more popular in recent years. Finland has had a programme of in-depth studies of fatal accidents since the 1970s. In the 1990s, Sweden started in-depth studies of fatal accidents, in part to help promote Vision Zero by identifying factors contributing to fatal accidents (or a fatal outcome of an accident), thereby hoping to prevent these accidents more effectively. In 2005, Norway started a similar programme of in-depth studies of fatal accidents. In-depth studies of accidents are also carried out in Great Britain, Germany and the Netherlands.

The popularity of in-depth studies of accidents has varied in cycles of about 30 years in the period after the Second World War. The first wave of such studies took place in the 1950s. It

was initiated as a reaction to the breakdown of accident proneness theory. It was felt that the statistical approach taken in many studies of accident proneness did not reveal the underlying causes of accidents and was therefore not very fruitful from the point of view of accident prevention. The hope was that the “real” causes of accidents could be found by studying each accident in great detail and reconstructing the events that led to the accident.

It soon became apparent that various human factors contributed importantly to most accidents. Many accidents happened simply because road users were not paying full attention to traffic. The first in-depth studies of accidents therefore often lead to recommendations to improve the education of road users, or to conduct information campaigns exhorting road users to pay attention to traffic, to always be fully alert, to always be on the lookout for hazards, etc, etc. It soon became apparent that these campaigns were ineffective. In-depth studies lost their popularity and a new approach to the study of factors contributing to accidents, systems theory, gained widespread acceptance. The central tenet of systems theory is that accidents are produced by a failure in the interaction between the elements of a complex system – hence it does not make sense to blame a single element, like the human factor, for accidents. That road users make errors is a given, although there is always a reason why these errors are made. That reason could be that the system was poorly designed and not sufficiently adapted to human capacities.

Systems theory was a stunning success as far as preventing accidents and making them less severe was concerned. Despite this, important elements were felt to be missing in systems theory, and a new wave of in-depth studies arose in the latter half of the 1970s, leading to thick reports in Great Britain the United States and Sweden (Rumar 1985). The findings were remarkably similar and it was once more concluded that human factors precipitated most accidents.

The third wave of in-depth studies is the one that is still going on. This wave has partly been brought on by the heightened ambitions for improving road safety, as expressed in concepts like Vision Zero (Vägverket 1997) and Sustainable Safety (Wegman, Aarts and Bax 2005). Another reason for the renewed interest in in-depth studies, is that methods for studying factors contributing to accidents have progressed and it is therefore believed that methodologically better studies can be made today than in the past. The use of such studies has often been very selective. Only a few accidents – often the most serious accidents – have been subjected to in-depth study. The techniques for performing in-depth studies have developed, and it is worthwhile to observe that recent studies in Norway and Sweden have broadened the scope of factors studied compared to older in-depth studies. More attention is now given to the potential contributions of factors related to infrastructure and vehicles, not just factors related to road users. Thus, in the most recent Norwegian in-depth study (Haldorsen et al. 2009), the following main categories of factors were listed as contributing to fatal accidents:

- | | |
|------------------------------------|---------------------------------------|
| 1. Factors related to road users: | 576 (2.43 factors per fatal accident) |
| 2. Factors related to vehicles: | 47 (0.20 factors per fatal accident) |
| 3. Factors related to the road: | 89 (0.38 per fatal accident) |
| 4. Factors related to environment: | 49 (0.21 per fatal accident) |

Factors related to road users are seen to dominate, but factors related to other elements of the system are also mentioned in quite a few cases. Human factors, however, is the only main category that was regarded as having contributed to all fatal accidents investigated in 2008.

The fact that factors that are the responsibility of road authorities are gaining more attention reflects a change in the way road authorities define their responsibility for road safety. In the past, road authorities adopted a strictly legal point of view and assigned the entire responsibility for road safety to road users. The emergence of new ideals for road safety, like Vision Zero and Sustainable Safety, and a more mature interpretation of the systems perspective on road safety, has changed this. This change in philosophy is part of the reason

why tools like road safety audits, safety inspections and road protection scoring have been developed. These tools are all based on the notion that there are safer and less safe road designs, and that it is the responsibility of road authorities to choose the safer designs. While it may be because a driver fell asleep that he went off the road, it is not the driver's fault if there are large and unprotected trees close to the road.

Official accident statistics are known to be incomplete and biased; if one wants better data, in particular about the most serious accidents, it is necessary to perform in-depth studies. The use of in-depth studies should remain selective, as it is today, at least in Norway and Sweden. It is not an indispensable element of road safety management. Road safety management can be successful without relying on in-depth studies. If, however, road authorities want to make use of in-depth studies as a tool of road safety management, the following points are worth bearing in mind:

1. A detailed protocol should be developed for in-depth studies. This protocol should describe the approach taken in detail. The theoretical framework for the studies should be made clear.
2. In-depth studies should be performed by a multi-disciplinary team, including experts in road design and traffic engineering, psychology, vehicle technology and medicine.
3. Reports from in-depth studies should have a standard format and always be available to the public. Data should be made anonymous to permit such public access.
4. In-depth studies should be performed for the accidents where better data are needed and likely to be made use of in road safety management.

5 Discussion and conclusions

Road safety has been greatly improved in many highly motorised countries during the past 40 years. While a rigorous analysis of the factors that have contributed to this development is difficult to perform, it seems clear that a systematic use of many road safety measures has contributed importantly to improving road safety. To use road safety measures in a way that brings about maximum benefits, a systematic approach to the planning and implementation of such measures is needed. To help support such planning, a number of road safety management tools have been developed. This report has reviewed ten of these instruments, including:

1. Road safety audits, to help incorporating the best knowledge about how to design a safe road into decisions about the design and construction of new roads, thus making new roads safer than existing roads,
2. Safety inspections, to systematically identify and treat defects in design and traffic control on existing roads, ideally speaking before these defects contribute to accidents,
3. Network screening, to survey road safety on the entire road system and identify those parts of the system that have a higher expected number of accidents, or a higher severity of accidents, than the rest of the system,
4. Accident modelling, to help identify and assess the importance of various factors that contribute to accidents and injuries,
5. Road protection scoring, to help identify roads which offer substandard protection from injury in case of an accident,
6. The identification and analysis of hazardous road locations, i.e. road locations that have an abnormally high number of accidents due to deficiencies of road design and/or traffic control,
7. Road safety impact assessment, which is estimates of the safety benefits expected from various road safety measures, made before these measures are introduced,
8. Monitoring of road user behaviour, to help detect unwanted changes in behaviour that may have an important effect on road safety,
9. Traffic conflict studies and naturalistic driving behaviour studies, which is the study of events that nearly lead to accidents or of driver behaviour in a natural setting,
10. In-depth accident studies, in order to learn more about the factors that precipitate accidents and the opportunities for controlling or removing these factors.

Use of these tools in eighteen European countries was described by means of a questionnaire. A statistical analysis of the relationship between use of the safety management tools and safety performance was made. No clear relationship between use of the tools and road safety performance could be found. It is likely that a number of weaknesses of the study made it difficult to correctly estimate the relationship between use of the tools and safety performance. These weaknesses include a small sample, a somewhat crude description of the use of the tools and poor control for potentially confounding variables.

The main conclusions of this study highlight the opportunities for further development of the tools for road safety management:

1. Road safety audits, safety inspections and road protection scoring can be further developed by evaluating their effects on safety and their performance in identifying safe and less safe solutions.
2. Network screening should be based on accident models and should apply the techniques developed in the Safety Analyst approach in the United States.

3. Road accident modelling needs to be developed by testing models empirically and by incorporating in them variables describing road user behaviour.
4. The identification and analysis of hazardous road location should employ the Empirical Bayes approach for identification of hazardous locations and the matched-pair approach for the analysis of factors that may contribute to accidents at hazardous road locations.
5. The state-of-the-art of road safety impact assessment is described in the Highway Safety Manual recently published in the United States. Changes made in current practice should try to bring it closer to the state-of-the-art.
6. Monitoring of road user behaviour should be targeted at about five types of behaviour that make the largest contributions to road accidents and injuries. In most countries, this would include speeding, not wearing seat belts and drinking and driving.
7. Conflict studies, naturalistic driver behaviour studies and in-depth studies of accidents are tools that road authorities may choose to include in their safety management toolbox; none of these tools are essential.

6 Sources

Aarts, L., Nes, N. van., Wegman, F., Schagen, I. van., Louwerse, R. Safe speeds and credible speed limits (sacredspeer): A new vision for decision making on speed management. Paper 09-1259. Transportation Research Board Annual Meeting 2009. Available on CD-Rom. 2009.

Assum, T., Sørensen, M. 130 dødsulykker med vogntog. Gjennomgang av dødsulykker 2005-2008 gransket av Statens vegvesens ulykkesanalysegrupper. Rapport 1061. Oslo, Transportøkonomisk institutt, 2010A.

Assum, T., Sørensen, M. Safety Performance Indicator for alcohol in road accidents – International comparison, validity and data quality. Accident Analysis and Prevention, 42, 595-603, 2010B.

Austin, R. D., Carson, J. L. An alternative accident prediction model for highway-rail interfaces. Accident Analysis and Prevention. 34, 31-42, 2002.

Broughton, J., Knowles, J. Providing the numerical context for British casualty reduction targets. Safety Science, 48, 1134-1141, 2010.

Brownfield, J., Faber, O. The application of safety audit principles as a means of accident prevention. Paper presented at the conference Road Safety in Europe and Strategic Highway Research Program. Prague, the Czech Republic. September 20-22. 1995. Proceedings, Volume 4A, part 4, 11-28.

Cafiso, S., Di Graziano, A., Di Silvestro, G., La Cava, G., Persaud, B. Development of comprehensive accident models for two-lane rural highways using exposure, geometry, consistency and context variables. Accident Analysis and Prevention. 42, 1072-1079, 2010.

Cardoso, J. L., Stefan, C., Elvik, R., Sørensen, M. Road safety inspection. Best practice and implementation plan. Report INCVC 3. Lisbon, LNEC, 2008.

Department for Transport. Mobile phone use by drivers: 2009. Survey results for England. Department for Transport, London, 2010.

Duffey, R. B., Saull, J. W.. Know the risk. Learning from errors and accidents: Safety and risk in today's technology. Butterworth-Heinemann, Burlington, Mass., 2003.

Elvik, R. A new approach to accident analysis for hazardous road locations. Transportation Research Record, 1953, 50-55, 2006A.

Elvik, R. Road safety inspections: safety effects and best practice guidelines. Report 850. Oslo, Institute of Transport Economics, 2006B.

Elvik, R. Prospects for improving road safety in Norway. A road safety impact assessment. Report 897. Oslo, Institute of Transport Economics, 2007A.

Elvik, R. State-of-the-art approaches to road accident black spot management and safety analysis of road networks. Report 883. Oslo. Institute of Transport Economics. 2007B.

Elvik, R. A survey of operational definitions of hazardous road locations in some European countries. Accident Analysis and Prevention, 40, 1830-1835, 2008A.

Elvik, R. Comparative analysis of techniques for identifying hazardous road locations. Transportation Research Record, 2083, 72-75, 2008B.

Elvik, R. Hvor mye kan trafikksikkerheten bedres med bedre veier? Arbeidsdokument SM/2024/2009. Oslo, Transportøkonomisk institutt, 2009.

Elvik, R. Strengthening incentives for efficient road safety policy priorities: The roles of cost-benefit analysis and road pricing. Safety Science, 48, 1189-1196, 2010A.

Elvik, R. Sources of uncertainty in estimated benefits of road safety programmes. Accident Analysis and Prevention, 42, 2171-2178, 2010B.

Elvik, R. Utviklingen i oppdagelsesrisiko for trafikkforseelser. Rapport 1059. Oslo, Transportøkonomisk institutt, 2010C.

Elvik, R. Assessing causality in multivariate accident models. *Accident Analysis and Prevention*, 43, 253-264, 2011.

Elvik, R., Erke, A., Christensen, P. Elementary units of exposure. *Transportation Research Record*, 2103, 25-31, 2009.

Elvik, R., Høye, A., Vaa, T., Sørensen, M. *The Handbook of Road Safety Measures*. Second edition. Emerald Publishing, Bingley, 2009.

Elvik, R., Veisten, K. Barriers to the use of efficiency assessment tools in road safety policy. Report 785. Oslo, Institute of Transport Economics, 2005.

EUR Lex. Directive 2008/96 of the European Parliament and of the Council of 19 November 2008 on road infrastructure safety management. (<http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=CELEX:32008/L0096>.)

European Road Assessment Programme (EuroRAP). Safer roads save lives. From Arctic to Mediterranean. First Pan-European Progress Report. EuroRAP. Worting House, Basingstoke, United Kingdom, 2005.

European Transport Safety Council (ETSC). Road safety audit and safety impact assessment. ETSC review. Brussels, ETSC, 1997.

European Union. European Commission. Directorate-General for Energy and Transport in cooperation with Eurostat. *Energy and Transport in Figures 2010. Part 3: Transport*. Brussels, Eurostat, 2010.

Evans, A. W. Estimating transport fatality risk from past accident data. *Accident Analysis and Prevention*, 35, 459-472, 2003.

Guo, F., Klauer, S. G., Hankey, J. M., Dingus, T. A. Using near-crashes as crash surrogate for naturalistic driving studies. Paper 10-1383. Transportation Research Board Annual Meeting, Washington D. C., 2010. Available on TRB CD-rom.

Haldorsen, I., Rostoft, M. S., Moen, E. T. Dybdeanalyser av dødsulykker i vegtrafikken 2005 – 2008, med særlig fokus på 2008. Rapport 06/2009. Oslo, Statens vegvesen, Vegdirektoratet, Veg- og trafikkavdelingen, Trafikksikkerhetsseksjonen, 2009.

Harwood, D. W., K. M. Bauer and D. J. Torbic. Safety Analyst: Software tools for safety management of specific highway sites. White paper for module 4 – evaluation. Federal Highway Administration. Washington DC. 2002A.

Harwood, D. W., I. B. Potts, A. Smiley, G. Bahar and E. Hauer. Safety Analyst: Software tools for safety management of specific highway sites. White paper for module 2 – diagnosis and countermeasure selection. Federal Highway Administration. Washington DC. 2002B.

Harwood, D. W. and E. K. Rabbani. Safety Analyst: Software tools for safety management of specific highway sites. White paper for module 3 – economic appraisal and priority ranking. Federal Highway Administration. Washington DC. 2002C.

Harwood, D. W., D. J. Torbic, K. M. Bauer, B. N. Persaud, C. A. Lyon, and E. Hauer. Safety Analyst: Software tools for safety management of specific highway sites. White paper for module 1 – network screening. Federal Highway Administration. Washington DC. 2002D.

Hauer, E. Traffic conflicts and exposure. *Accident Analysis and Prevention*, 14, 359-364, 1982.

Hauer, E. *Observational before-after studies in road safety*. Oxford, Elsevier Science, 1997.

Hauer, E. On prediction in road safety. *Safety Science*, 48, 1111-1122, 2010A.

Hauer, E. Lessons learned from other countries. White Paper No. 9. July 8, 2010. White Papers for "Toward Zero Deaths: A National Strategy on Highway Safety". Contract DTFH61-05-D-00024. 2010B.

Hauer, E. Cause, effect and regression in road safety: A case study. *Accident Analysis and Prevention*, 42, 1128-1135, 2010C.

Hauer, E., Bamfo, J. Two tools for finding what function links the dependent variable to the explanatory variables. Paper presented at ICTCT workshop in Lund. Sweden, November 5-7, 1997.

Hauer, E., Gårder, P. Research into the validity of the traffic conflicts technique. *Accident Analysis and Prevention*, 18, 471-481, 1986.

Hempel, C. G. Aspects of scientific explanation and other essays in the philosophy of science. New York, The Free Press, 1965.

Highway Safety Manual. First edition. American Association of State Highway and Transportation Officials (AASHTO). Washington D. C., 2010.

Hirst, W. M., Mountain, L. J., Maher, M. J. Sources of error in road safety scheme evaluation: a method to deal with outdated accident prediction models. *Accident Analysis and Prevention*, 36, 717-727, 2004.

Johnston, I. Beyond "best practice" road safety thinking and systems management – a case for culture change research. *Safety Science*, 48, 1175-1181, 2010.

Kaufmann, D., Kraay, A., Mastruzzi, M. The worldwide governance indicators. Methodology and analytical issues. Policy Research Working Paper 5430. Washington D. C., The World Bank, 2010.

Kim, D-G., Washington. S. The significance of endogeneity problems in crash models: an examination of left-turn lanes in intersection crash models. *Accident Analysis and Prevention*, 38, 1094-1100, 2006.

Klauer, S. G., Dingus, T. A., Neale, V. L., Sudweeks, J. D., Ramsey, D. J. The impact of driver inattention on near-crash/crash risk: An analysis using the 100-car naturalistic driving study data. Report DOT HS 810 594. Washington D. C., U. S. Department of Transportation. National Highway Traffic Safety Administration. 2006.

Larsson, P., Dekker, S. W. A., Tingvall. C. The need for a systems theory approach to road safety. *Safety Science*, 48, 1167-1174, 2010.

Laureshyn. A. Application of automated video analysis to road user behaviour. Doctoral thesis. Lund Institute of Technology, Department of Traffic Planning and Social Development, Lund, 2010.

Laureshyn, A., Svensson, Å., Hydén, C. Evaluation of traffic safety, based on micro-level behavioural data: Theoretical framework and first implementation. *Accident Analysis and Prevention*, 42, 1637-1646, 2010.

Lord, D. Modeling motor vehicle crashes using Poisson-gamma models: Examining the effects of low sample mean values and small sample size on the estimation of the fixed dispersion parameter. *Accident Analysis and Prevention*, 38, 751-766, 2006.

Lord, D. Mannering, F. The statistical analysis of crash-frequency data: A review and assessment of methodological alternatives. *Transportation Research Part A*, 44, 291-305, 2010.

Lord, D., Miranda-Moreno, L. F. Effects of low sample mean values and small sample size on the estimation of the fixed dispersion parameter of Poisson-gamma models for modeling motor vehicle crashes: A Bayesian perspective. *Safety Science*, 46, 751-770, 2008.

- Lundberg, J., Rollenhagen, C., Hollnagel, E. What-you-look-for-is-what-you-find – the consequences of underlying accident models in eight accident investigation manuals. *Safety Science*, 47, 1297-1311, 2009.
- Macaulay, J., Mcinerney, R. Evaluation of the proposed action emanating from road safety audits. Australian Road Research Board, Austroads, Sydney, 2002.
- Malyshkina, N., Mannering, F. Zero-state Markov switching count-data models: An empirical assessment. *Accident Analysis and Prevention*, 42, 122-130, 2010.
- Manski, C. F. Identification problems in the social sciences. Cambridge, Mass., Harvard University Press, 1995.
- Pardillo-Mayora, J. M., Dominguez-Lira, C. A., Jurado-Pina, R. Empirical calibration of a roadside hazardousness index for Spanish two-lane rural roads. *Accident Analysis and Prevention*, 42, 2018-2023, 2010.
- Peltola, H. Evaluating measures in order to achieve safety targets. Paper presented at the conference Road Safety on Four Continents, Bangkok, 2007.
- Peltola, H. Evaluating road safety and safety effects using Empirical Bayes method. Paper presented at 4th IRTAD Conference, Seoul, 2009.
- Peltola, H., Kulmala, R. Accident models. Paper presented at NVF conference in Iceland, September 7-8, 2006.
- Popper, K. Objective knowledge. An evolutionary approach. Oxford, Clarendon Press, 1978.
- Rumar, K. The role of perceptual and cognitive filters in observed behavior. In Evans, L., Schwing, R. C. (Eds): *Human Behavior and Traffic Safety*, 151-170. New York, Plenum Press, 1985.
- Sagberg, F., Assum, T. Dybdestudier av trafikkulykker. Analyse av materiale fra 196 dødsulykker i Mälardalen 1997-99. Rapport 499. Oslo, Transportøkonomisk institutt, 2000.
- Schelling, A. Road safety audit. the Danish experience. Paper presented at the conference Road Safety in Europe and Strategic Highway Research Program. Prague, the Czech Republic. September 20-22, 1995. *Proceedings*, Volume 4A, part 4, 1-10.
- Shadish, W. R.; Cook, T. D.; Campbell, D. T. *Experimental and quasi-experimental designs for generalized causal inference*. Boston, Houghton Mifflin Company, 2002.
- Shinar, D. *Traffic safety and human behavior*. Oxford, Elsevier Science, 2007.
- Statens vegvesen. Trafikksikkerhetsrevisjoner- og inspeksjoner. Håndbok 222. Oslo, Statens vegvesen, Vegdirektoratet, 2005.
- Stigson, H. A safe road transport system – factors influencing injury outcome for car occupants. Thesis for doctoral degree. Stockholm, Karolinska Institutet, 2009.
- Svensson, Å., Hydén, C. Estimating the severity of safety related behavior. *Accident Analysis and Prevention*, 38, 379-385, 2006.
- Toivonen, S. "Crash violence" within the traffic system. Risks and their reduction in road traffic on two-lane main roads in Finland (LINTU/VIOILA). Helsinki, Finnish Road Administration, 2006.
- Vaneerdewegh, P., Matena, S. RSA requirements for a training curriculum for the education of auditors and validated measures to improve road safety. RIPCORD-ISEREST deliverable 4.3. Brussels, Belgian institute for road safety research, 2007.
- Vägverket. Vision Zero. An idea for transport system without deaths and permanent health losses. Borlänge, Vägverket, 1997.
- Wegman, F., Aarts, L., Bax, C. Advancing sustainable safety. National road safety outlook for The Netherlands for 2005-2020. *Safety Science*, 46, 323-343, 2008.

Wegman, F., Hagenzieker, M. Editorial Safety Science special issue road safety management. Safety Science, 48, 1081-1084, 2010.

Wegman, F., Oppe, S. Benchmarking road safety performances of countries. Safety Science, 48, 1203-1211, 2010.

Wesemann, P., Norden, Y. van, Stipdonk, H. An outlook on Dutch road safety in 2020; future developments of exposure, crashes and policy. Safety Science, 48, 1098-1105, 2010.

Wong, S. C., Sze, N. N. Is the effect of quantified road safety targets sustainable? Safety Science, 48, 1182-1188, 2010.

7 Appendix 1: Questionnaire

The aim of this questionnaire is to survey the use in European countries of ten evaluation tools for road safety management. The ten evaluation tools, with a very short description of each tool, are listed below:

Evaluation tool	Short description
Road safety audit	Systematic assessment of designed elements relevant for safety for new/planned roads.
Road safety inspection	Systematic assessment of safety for an existing road (sometimes known as road safety assessment). Similar to road safety audits but for existing roads.
Network screening	Screening of accident data to identify road sections/links with a high number of accidents or high accident rates.
Accident modelling	Multivariate statistical analyses designed to estimate effects of factors influencing the number of accidents.
Road protection scoring	Assessment of how well a road protects from injury in case of accident.
Identification and analysis of hazardous road locations	Cluster and density analysis to formally identify sites that have a high number of accidents (sometimes known as blackspot analysis).
Road safety impact assessment	Estimation of the number of accidents or injured road users expected to be prevented by specific road safety measures. (Extended to economic appraisal when benefit to cost returns considered).
Conflict studies	Systematic collection of observational data concerning events almost resulting in accidents.
Monitoring road user behaviour	Observation of road user behaviour and compilation of statistics on behaviour (e.g. seatbelt wearing rates etc.).
In-depth accident studies	More detailed investigations of circumstances of individual accidents than normally done in routine reporting.
Other tools	Any other tool used in safety management.

The questionnaire has two parts. The first part is intended to collect information regarding current use of the evaluation tools. The second part offers an opportunity to assess the evaluation tools in terms of six criteria that influence the ease of their use. All questions can be answered by ticking boxes.

Are any of the following tools used in the safety management of roads? Please answer yes (by road authority or other organisation) or no for each of the tools listed:

	Yes		No
	By road authority	By other organisation	
Road safety audits	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Road safety inspections	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Network screening	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Accident modelling	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Road protection scoring	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Identification and analysis of hazardous road locations	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Impact assessment of road safety measures	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Conflict studies/naturalistic driving studies	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Monitoring of road user behaviour	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
In-depth analysis of accidents	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>
Other tools	<input type="text" value="1A"/>	<input type="text" value="1O"/>	<input type="text" value="0"/>

Please specify if any other tool is used:

Supplementary questions are asked with respect to some of the evaluation tools. These questions are listed below.

Supplementary questions regarding accident modelling (please answer if the tool is used by road authority or another organisation)

Who developed the accident model or models?

Research institute

Highway agency

Don't know

Is the model updated regularly?

Yes

No

Don't know

What relationships do the models include?

Traffic volume only

Multiple explanatory variables

Don't know

Supplementary questions regarding road protection scoring (please answer if the tool is used by road authority or another organisation)

Who scores roads?

Highway agency

Other organisation

Don't know

Does road protection score influence priorities for safety treatment?

Yes

No

Don't know

Supplementary questions regarding impact assessment (please answer if the tool is used by road authority or another organisation)

What is the scope of road safety impact assessment?

Major projects

All safety measures

Don't know

Is the basis for impact assessments updated regularly?

Yes

No

Don't know

Is the accuracy of impact assessments evaluated?

Yes

No

Don't know

Supplementary questions regarding monitoring of road user behaviour (please answer if the tool is used by road authority or another organisation)

Please specify which types of behaviour are monitored regularly?

Speed	<input type="text" value="S"/>
Mobile phone use	<input type="text" value="M"/>
Seatbelt use	<input type="text" value="B"/>
Motorcycle helmet use	<input type="text" value="H"/>
Close following	<input type="text" value="F"/>

Other (please specify):

This part of the questionnaire asks you to assess the applicability (ease of use) of these tools with respect to six criteria: need for collecting new data, use of standardised procedures, reporting requirements, need for training and specialised skills, objectivity and transparency, and ease of updating. A short explanation of each of these criteria is given below. You are asked to rate each of the tools with respect to each of the criteria using the scale provided in the questionnaire.

Criterion for assessment	Short description
Need for data collection	If use of a tool requires the collection of new data or if routinely collected data can be used
Standard procedure	Whether a standard procedure for using a tool has been developed or not
Reporting requirements	If a written report presenting results is required each time a tool is used
Training and special skills	If training, formal authorisation and specialised skills are needed to use a tool
Objectivity and transparency	Objectivity: different people using the same tool based on the same data should get identical results. Transparency: reasons are given for all choices made when applying a tool
Ease of updating	Whether updating requires collection of new data or can be done without new data

Tool	Criterion	Assessment of each criterion			
		High	Medium	Low	Don't know
Road safety audits	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>

Tool	Criterion	Assessment of each criterion			
		High	Medium	Low	Don't know
Road safety inspections	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
Network screening	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
Accident modelling	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>

Tool	Criterion	Assessment of each criterion			
		High	Medium	Low	Don't know
Road protection scoring	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
Identification and analysis of hazardous locations	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
Road safety impact assessment	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>

Tool	Criterion	Assessment of each criterion			
		High	Medium	Low	Don't know
Conflict studies	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
Monitoring road user behaviour	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
In-depth accident studies	Need for original data	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for standard procedure	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Reporting requirements	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Need for training and specialised skills	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Objectivity and transparency	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>
	Ease of updating	<input type="text" value="3"/>	<input type="text" value="2"/>	<input type="text" value="1"/>	<input type="text" value="0"/>

9 Appendix 2: Responses to the questionnaire

Item	AUS	CYP	DEN	EST	FIN	FRA	GBR	GER	HUN	ICE	IRL	LUX	NED	NOR	PORT	SLO	SPN	SWE
Audits	1	0	1A	1A	1	1A	1A	1	1AO	1A	1A	1A	1A	1A	1O	1AO	1A	0
Inspections	1	1A	1A	1A	1	1A	1A	1	1A	1A	0	1A	1	1A	1A	1A	1A	0
Screening	1	1A	1A	0	1	1A	1A	1A	1AO	1A	1A	1	1	1A	0	1AO	1A	1A
Modelling	1	0	1A	0	1	1A	1A	1	0	0	0	0	1	1A	1O	1AO	1O	1A
Scoring	0	0	0	0	0	0	1O	1A	0	1O	1O	0	1	1A	0	0	1AO	1O
Blackspots	1	1A	1A	1A	1	1A	1A	1	1AO	1A	1A	0	1	1A	1AO	1AO	1A	0
Impacts	1	1A	1A	0	1	1A	1A	1	0	1A	1A	0	1	1A	1O	1AO	1A	1A
Conflicts	1	0	1A	0	0	1	0	1A	1AO	0	0	0	1	0	1O	1AO	1O	0
Behaviour	1	1O	1A	1A	1	1	1O	1	1O	1O	1O	1O	1	1A	1O	1O	1O	1A
In-depth	1	0	1A	1A	1	1	1	1	1O	1O	1A	0	1	1A	0	1O	1AO	1A
Other	0	0	0	0	1	0	1	0	0	0	1A	0	1	0	0	0	0	1A
Index of use (15)	13	8	12	7	13	13	14	14	10	12	11	7	15	13	10	13	14	9
Model development	1R	0	1R	0	1R	1R	1R	1R	0	0	0	0	1R	1R	1R	0	1R	1A
Model updating (1)	0	0	1	0	1	0	0	1	0	0	0	0	1	1	1	0	0	1
Model variables (2)	2	0	1	0	1	2	2	1	0	0	0	0	2	2	2	0	2	2
Who scores	0	0	0	0	0	0	1O	0	0	1O	1O	0	1O	1A	0	0	1AO	1O
Use of scores (1)	0	0	0	0	0	0	0	0	0	1	1	0	1	1	0	0	1	0
Scope impact (2)	1	1	1	0	1	2	1	1	0	1	1	0	1	2	2	0	2	2
Update impact (1)	0	0	1	0	1	1	1	1	0	0	1	0	1	1	0	0	1	1
Validate impact (1)	0	0	0	0	1	0	1	0	0	1	1	0	1	1	1	0	0	1
Details for tools (8)	3	1	4	0	7	5	6	4	0	3	4	0	7	8	6	0	6	7
Speed (2)	1	1	1	1	1	1	1	0	1	1	1	1	1	1	1	1	1	1
Mobile (1)	1	1	0	1	1	1	1	0	1	1	1	1	1	0	0	1	0	0
Belts (2)	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Helmets (1)	1	1	1	0	1	0	0	1	1	0	0	0	1	0	1	1	1	0
Following (1)	1	0	0	1	1	0	0	0	0	0	0	0	1	0	0	0	0	0
Other (alc = 2)	0	0	0	1	1	1	0	0	1	0	0	0	1	0	0	1	0	0
Behaviour (9)	7	6	5	7	9	7	5	3	8	5	5	5	9	4	5	8	5	4
Audit data	1	0	3	3	0	2	2	3	1	3	3	2	2	1	1	2	3	0
Audit procedure	1	0	3	3	0	3	3	2	1	3	3	3	2	1	3	2	3	0
Audit reporting	2	0	3	3	0	3	3	3	3	3	3	2	2	1	3	3	3	0
Audit training	2	0	3	2	0	2	3	3	2	3	3	3	3	1	3	2	3	0
Audit objectivity	2	0	3	0	0	3	2	2	2	3	3	3	3	1	2	2	2	0
Audit updating	2	0	3	3	0	1	3	3	1	0	3	1	2	1	1	1	3	0
Audit mean	1.67	0.00	3.00	2.33	0.00	2.33	2.67	2.67	1.67	2.50	3.00	2.33	2.33	1.00	2.17	2.00	2.83	0.00
Insp data	2	1	3	2	0	1	2	3	2	3	0	3	3	1	3	2	2	0

WP3 Evaluation tools, Final report

Insp procedure	1	2	3	3	0	3	3	1	1	3	0	3	3	1	3	2	3	0
Insp reporting	2	2	3	3	0	3	2	2	3	3	0	3	3	1	3	3	3	0
Insp training	2	2	3	2	0	3	2	2	2	3	0	2	2	1	3	2	2	0
Insp objectivity	2	3	3	0	0	2	2	2	2	2	0	2	3	1	2	2	2	0
Insp updating	1	1	3	2	0	3	3	3	1	1	0	1	2	1	1	1	2	0
Insp mean	1.67	1.83	3.00	2.00	0.00	2.50	2.33	2.17	1.83	2.50	0.00	2.33	2.67	1.00	2.50	2.00	2.33	0.00
Scree data	3	3	3	0	0	2	1	2	1	1	3	2	3	1	2	2	1	2
Scree procedure	2	2	3	0	0	2	3	3	2	3	3	3	2	1	2	2	3	2
Scree reporting	1	2	3	0	0	1	3	1	1	3	3	3	3	1	1	1	3	2
Scree training	1	2	3	0	0	0	3	2	1	3	3	1	2	1	2	1	2	2
Scree objectivity	2	2	3	0	0	0	3	3	3	3	3	2	2	1	2	3	3	2
Scree updating	3	2	3	0	0	1	3	1	3	3	3	1	2	1	3	2	1	2
Scree mean	2.00	2.17	3.00	0.00	0.00	1.00	2.67	2.00	1.83	2.67	3.00	2.00	2.33	1.00	2.00	1.83	2.17	2.00
Model data	3	0	3	0	0	3	3	3	3	0	0	3	3	1	3	3	2	2
Model procedure	3	0	3	0	0	0	3	3	3	0	0	3	3	1	2	3	3	2
Model reporting	2	0	2	0	0	0	3	1	2	0	0	2	2	1	2	2	3	2
Model training	2	0	3	0	0	0	3	3	3	0	0	3	3	1	3	3	3	2
Model objectivity	3	0	3	0	0	0	2	3	3	0	0	3	2	1	3	3	3	2
Model updating	3	0	3	0	0	0	1	3	3	0	0	1	2	1	2	3	3	2
Model mean	2.67	0.00	2.83	0.00	0.00	0.50	2.50	2.67	2.83	0.00	0.00	2.50	2.50	1.00	2.50	2.83	2.83	2.00
Score data	3	0	0	0	0	0	3	0	3	0	3	3	3	1	3	3	1	3
Score procedure	3	0	0	0	0	0	3	0	3	3	3	3	3	1	3	3	3	3
Score reporting	0	0	0	0	0	0	2	0	2	3	3	2	3	1	3	2	3	3
Score training	3	0	0	0	0	0	3	0	2	3	3	3	3	1	3	2	2	3
Score objectivity	3	0	0	0	0	0	2	0	3	0	3	2	3	1	2	3	2	3
Score updating	3	0	0	0	0	0	2	0	1	0	3	1	1	1	1	1	3	3
Score mean	2.50	0.00	0.00	0.00	0.00	0.00	2.50	0.00	2.33	1.50	3.00	2.33	2.67	1.00	2.50	2.33	2.33	3.00
Spot data	2	3	3	3	0	2	1	2	3	1	3	2	0	1	2	3	1	0
Spot procedure	1	2	3	2	0	3	3	2	2	3	3	3	2	1	3	2	3	0
Spot reporting	2	2	3	2	0	2	3	1	2	3	3	2	3	1	2	3	3	0
Spot training	2	2	3	1	0	2	3	2	3	3	3	3	2	1		3	2	0
Spot objectivity	1	2	3	0	0	2	3	2	2	2	3	2	2	1	2	3	3	0
Spot updating	2	2	3	2	0	2	2	2	2	1	3	1	2	1	3	2	3	0
Spot mean	1.67	2.17	3.00	1.67	0.00	2.17	2.50	1.83	2.33	2.17	3.00	2.17	1.83	1.00	2.40	2.67	2.50	0.00
Impact data	2	2	3	0	0	3	1	2	3	3	3	2	3	1	3	3	3	2
Impact procedure	3	2	3	0	0	3	3	3	3	3	3	3	3	1	2	3	3	3
Impact reporting	2	3	3	0	0	1	3	1	2	3	3	2	3	1	2	2	3	3
Impact training	2	3	3	0	0	3	3	1	2	3	3	3	3	1	2	2	3	3
Impact objectivity	2	3	3	0	0	2	2	3	2	2	3	2	3	1	2	2	1	3

WP3 Evaluation tools, Final report

Impact updating	2	1	3	0	0	1	3	1	3	0	3	2	2	1	2	3	3	3
Impact mean	2.17	2.33	3.00	0.00	0.00	2.17	2.50	1.83	2.50	2.33	3.00	2.33	2.83	1.00	2.17	2.50	2.67	2.83
Confl data	3	3	2	0	0	3	3	3	2	0	0	0	3	0	3	2	3	0
Confl procedure	3	0	3	0	0	3	3	3	1	0	0	0	3	0	2	1	3	0
Confl reporting	0	0	3	0	0	3	3	1	1	0	0	0	3	0	1	1	2	0
Confl training	2	0	3	0	0	3	3	3	1	0	0	0	3	0	3	1	3	0
Confl objectivity	3	0	2	0	0	2	2	1	2	0	0	0	2	0	1	2	1	0
Confl updating	3	0	0	0	0	1	1	3	1	0	0	0	2	0	2	1	2	0
Confl mean	2.33	0.50	2.17	0.00	0.00	2.50	2.50	2.33	1.33	0.00	0.00	0.00	2.67	0.00	2.00	1.33	2.33	0.00
Behav data	3	3	3	3	0	3	3	3	2	3	3	0	3	1	3	2	3	3
Behav procedure	2	2	3	3	0	3	3	2	1	3	3	0	3	1	2	1	3	3
Behav reporting	2	1	3	3	0	3	3	3	1	3	3	0	3	1	1	1	2	3
Behav training	2	1	3	1	0	3	2	3	1	3	3	0	3	1	1	1	2	3
Behav objectivity	2	2	3	2	0	2	3	2	2	3	3	0	2	1	3	2	2	3
Behav updating	3	2	3	1	0	1	2	3	1	1	3	0	2	1	2	1	2	3
Behav mean	2.33	1.83	3.00	2.17	0.00	2.50	2.67	2.67	1.33	2.67	3.00	0.00	2.67	1.00	2.00	1.33	2.33	3.00
Depth data	3	0	3	0	0	3	2	3	3	2	3	0	3	1	0	3	2	3
Depth procedure	2	0	3	0	0	3	3	2	3	3	3	0	3	1	0	3	3	3
Depth reporting	3	0	3	0	0	3	3	1	3	3	3	0	3	1	0	3	2	3
Depth training	3	0	3	0	0	3	3	3	2	3	3	0	3	1	0	2	3	3
Depth objectivity	3	0	3	0	0	2	3	2	3	2	3	0	3	1	0	3	3	3
Depth updating	2	0	3	0	0	1	1	3	3	1	3	0	2	1	0	3	3	0
Depth mean	2.67	0.00	3.00	0.00	0.00	2.50	2.50	2.33	2.83	2.33	3.00	0.00	2.83	1.00	0.00	2.83	2.67	2.50

10 Appendix 3: Long term trends in road accident fatalities in 17 countries

